

Main Specifications

Impedance: 50Ω

Frequency range: DC-67GHz

VSWR: ≤1.25

Dielectric withstanding voltage(V.R.M.S.): 750V

Durability: ≥500

Material/Plating


Body: Stainless steel Passivated

Center Conductor: Beryllium copper Gold


Insulators: PEI

PA6262J

Right Angle, 1.85mm Male to 1.85mm Male

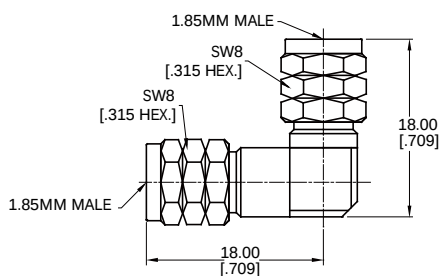


Typical Test Data

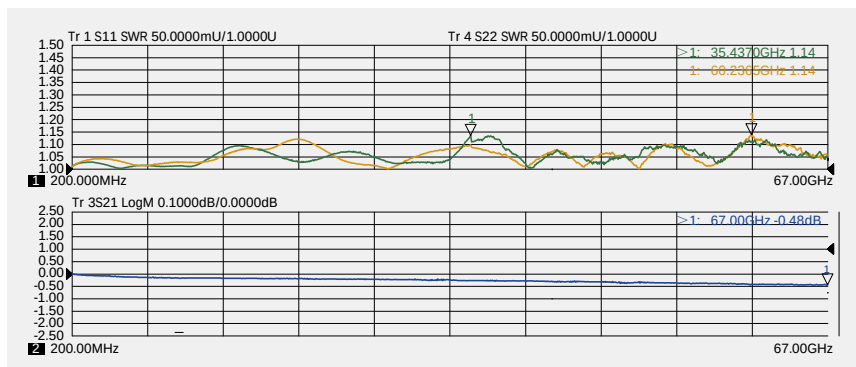


PA6262K

Right Angle, 1.85mm Female to 1.85mm Male

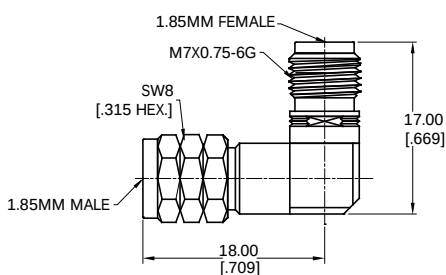


Typical Test Data

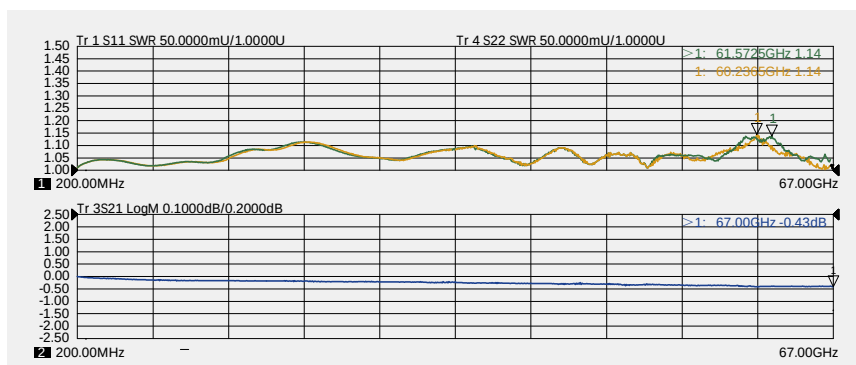

PA6262L

Right Angle, 1.85mm Female to 1.85mm Female

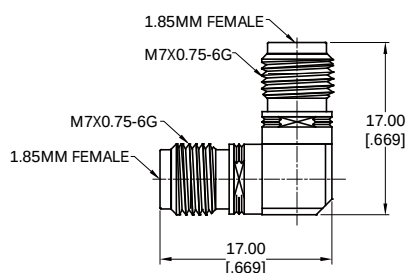

Typical Test Data

