

DC-50 GHz
2.4mm Adapters




Main Specifications

Impedance: 50Ω
Frequency range: DC~50GHz
VSWR: ≤1.15
Dielectric withstanding voltage(V.R.M.S.): 750V
Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
Center Conductor: Beryllium copper Gold
Insulators: PEI

2.4mm(m) to 2.4mm(m)

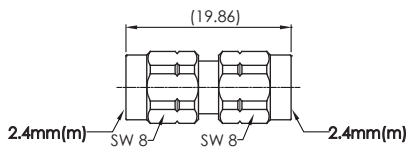


PA2222A

2.4mm(m) to 2.4mm(f)

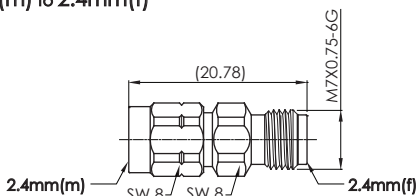


PA2222BA

2.4mm(f) to 2.4mm(f)

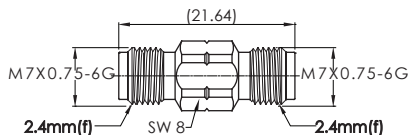

PA2222CA

2.4mm(f) to 2.4mm(f) Bulkhead

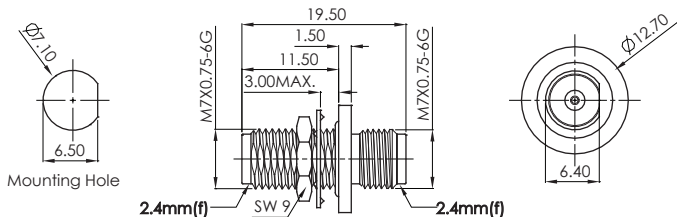


PA2222E

DC-50 GHz
NMD2.4mm Adapters




NMD2.4mm(f) to 2.4mm(f)

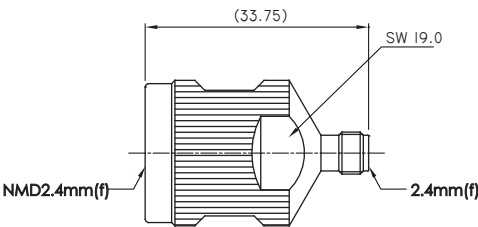


PA6822C

NMD2.4mm(f) to 2.92mm(f)

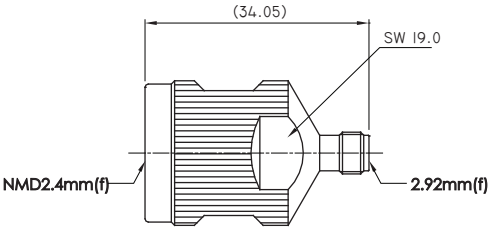


PA6829C

NMD2.4mm(f) to NMD2.92mm(m)

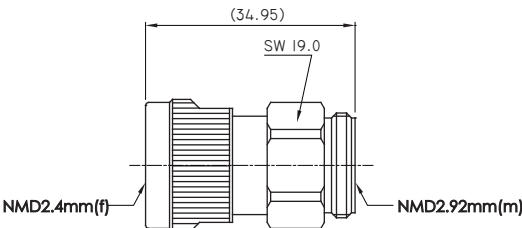

PA6864B

NMD2.4mm(f) to NMDmm(m)

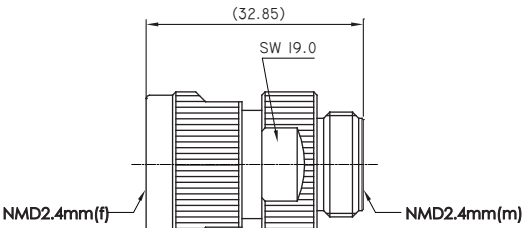

PA6868B