

DC-40 GHz 2.92mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~40GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 750V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

2.92mm(m) to 2.92mm(m)

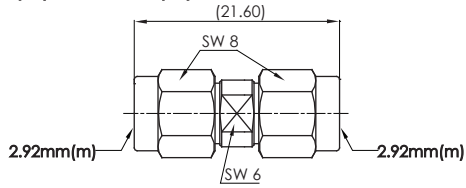


PA2929A

2.92mm(m) to 2.92mm(f)

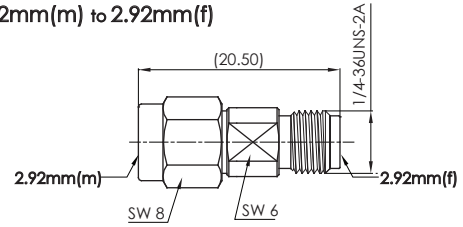


PA2929B

2.92mm(f) to 2.92mm(f)

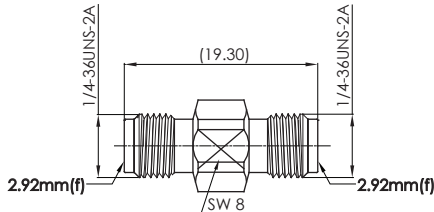


PA2929C

2.92mm(f) to 2.92mm(f) 4 Hole Flange

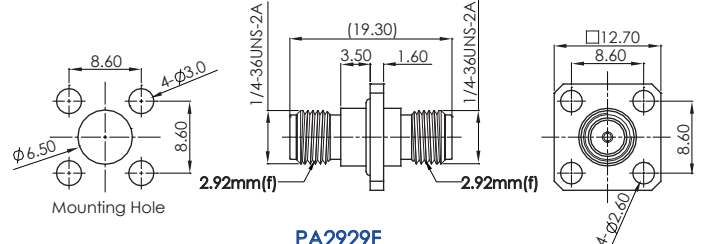


PA2929F

2.92mm(f) to 2.92mm(f) 4 Hole Flange

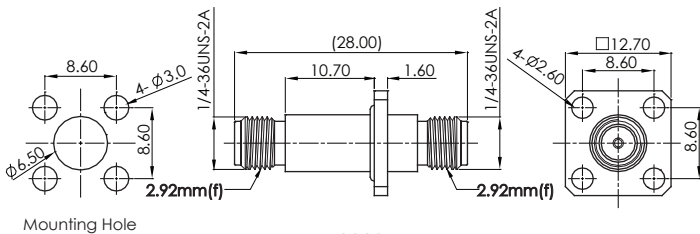


PA2929FA

2.92mm(f) to 2.92mm(f) Bulkhead

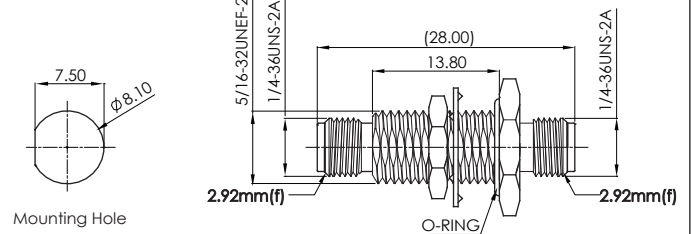


PA2929G

2.92mm(f) to 2.92mm(f) Bulkhead

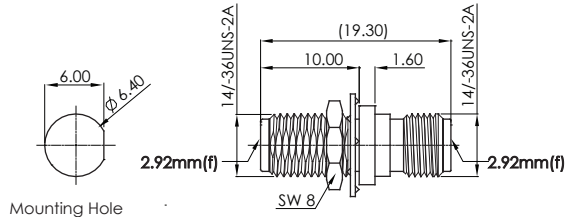


PA2246

Right Angle 2.92mm(m) to 2.92mm(m)

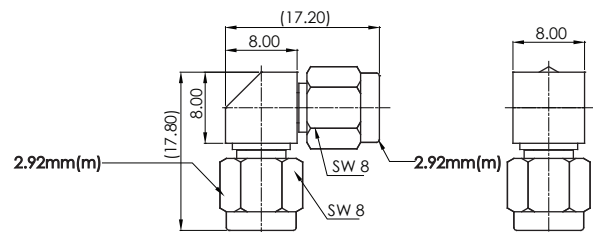


PA2929J

Right Angle 2.92mm(m) to 2.92mm(f)

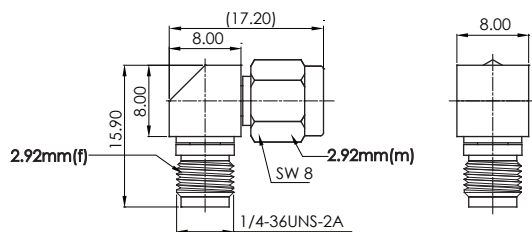

PA2929K

Right Angle 2.92mm(f) to 2.92mm(f)

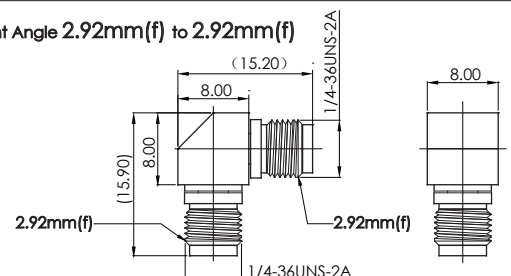

PA2929L

DC-40 GHz 2.92mm to 2.4mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~40GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 750V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

2.92mm(m) to 2.4mm(m)

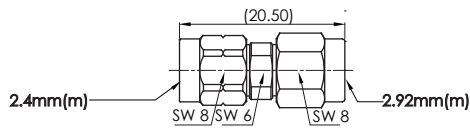


PA2229A

2.92mm(f) to 2.4mm(m)

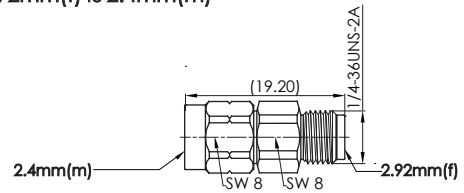


PA2229B

2.92mm(f) to 2.4mm(f)

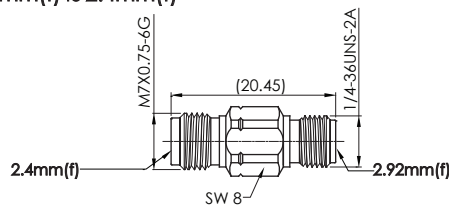



PA2229C

2.92mm(m) to 2.4mm(f)

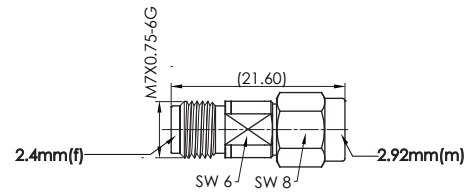

PA2229D

2.92mm(f) to 2.4mm(f) 4 Hole Flange

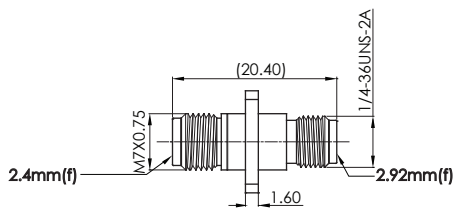

PA2229F

DC-40 GHz 2.92mm to 1.85mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~40GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 750V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

2.92mm(m) to 1.85mm(m)

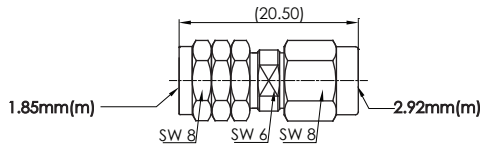


PA6229A

2.92mm(f) to 1.85mm(m)

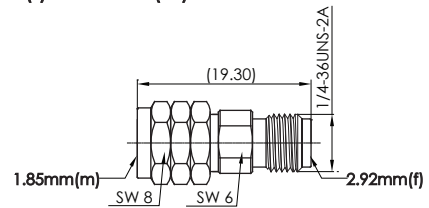


PA6229B

2.92mm(f) to 1.85mm(f)

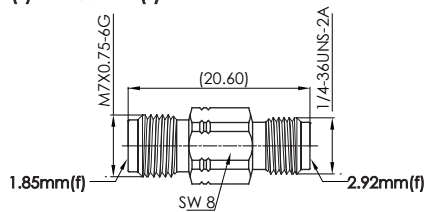

PA6229C

2.92mm(m) to 1.85mm(f)

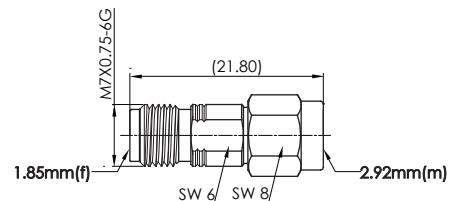

PA6229D

DC-40GHz SMP to 2.92mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~40GHz
 VSWR: ≤1.20 @ DC~18GHz
 ≤1.30 @ 18~26.5GHz
 ≤1.50 @ 26.5~40GHz

Material/Plating


Body: Brass/Beryllium copper Gold
 Stainless steel Passivated
 Center Conductor: Brass/Beryllium copper Gold
 Insulators: PTFE

SMP(m) to 2.92mm(m)

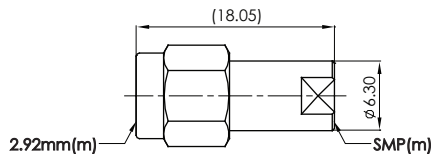


Adapter No.	Finish	Interface
ANO291-931-1327-1	Passivated	Full Detent
ANO291-931-1327-2	Passivated	Limited Detent
ANO291-931-1327-3	Passivated	Smooth Bore

SMP(f) to 2.92mm(m)

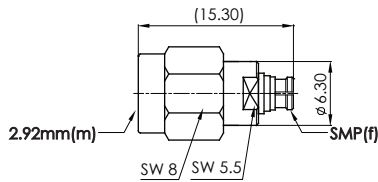

Adapter No.	Finish
ANO291-932-1325	Gold

SMP(m) to 2.92mm(f)

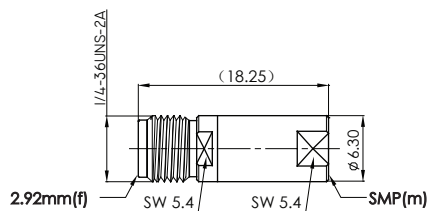

Adapter No.	Finish	Interface
ANO292-931-1326-1	Passivated	Full Detent
ANO292-931-1326-2	Passivated	Limited Detent
ANO292-931-1326-3	Passivated	Smooth Bore