


I.0 ELECTRICAL DATA:

- I.1 IMPEDANCE: 50 OHMS
- I.2 FREQUENCY RANGE: DC-90 GHZ
- I.3 VSWR: 1.35 MAX.
- I.4 INSERTION LOSS: 3.50 DB MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/16/21	J. QU

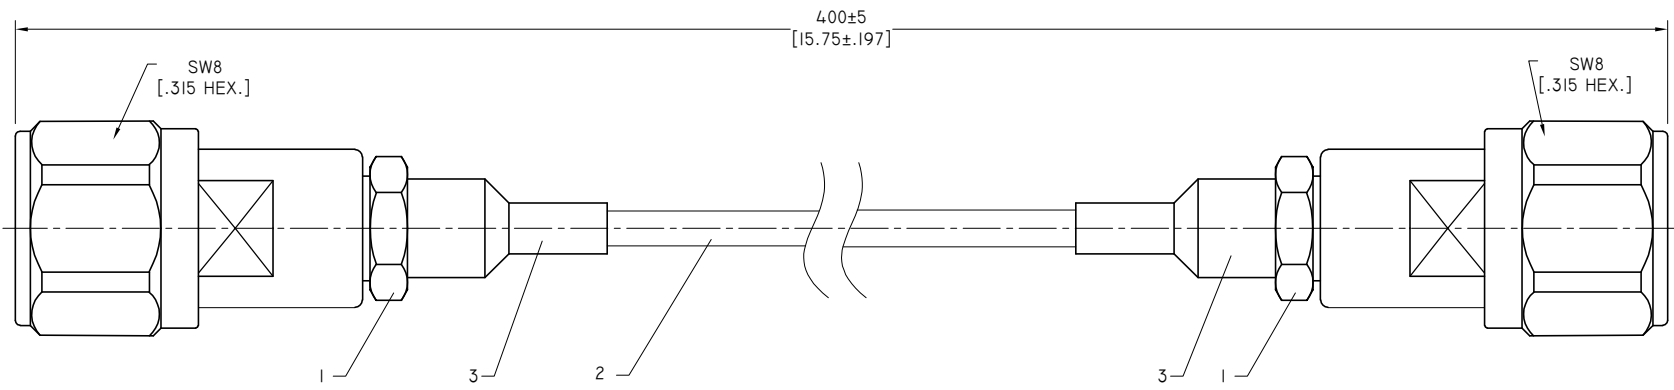

SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY
3	ANO 8.687.159	ADHESIVE HEAT-SHRINK TUBE	2
2	ANO AFLEX047	AFLEX047 CABLE	1
1	ANO 8011-2003	1.35MM STRAIGHT MALE SOLDER FOR .047 CABLE	2

DRAWN	DATE	
W. YANG	06/16/21	
CHECKED	DATE	
X. B. YANG	06/16/21	
APPROVED	DATE	TITLE
J. QU	06/16/21	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD</small>
.XX	±0.13 [.005"]	
.X	±0.20 [.008"]	
X	±0.50 [.019"]	
X°	±1°	
X°	±2°	

VIEW		PART NO.	
		AF047-13M-13M-300MM	
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A