

4

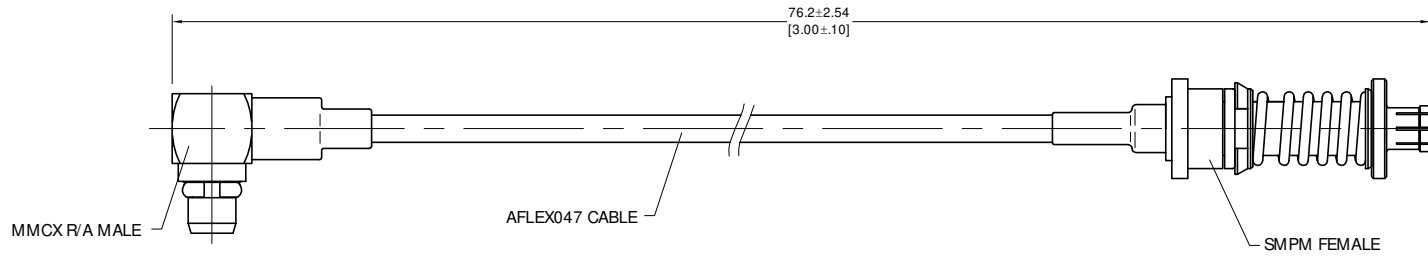
3

2

1



**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-500 MHz
- 3 VSWR: 1.10 MAX
- 4 INSERTION LOSS: 0.45 dB MAX



TITLE  
 CABLE ASSEMBLY, MMCX RIGHT ANGLE MALE TO VITA67.3  
 PLUG-IN CONTACT SMPM STRAIGHT FEMALE , AFLEX-047  
 CABLE, 3 INCHES

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
 4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO.		
 	AF047-MMCXLM-SMPM(F)-3		
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A

4

3

2

1