

4



3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-6 GHz
- 3 VSWR: 1.20 MAX

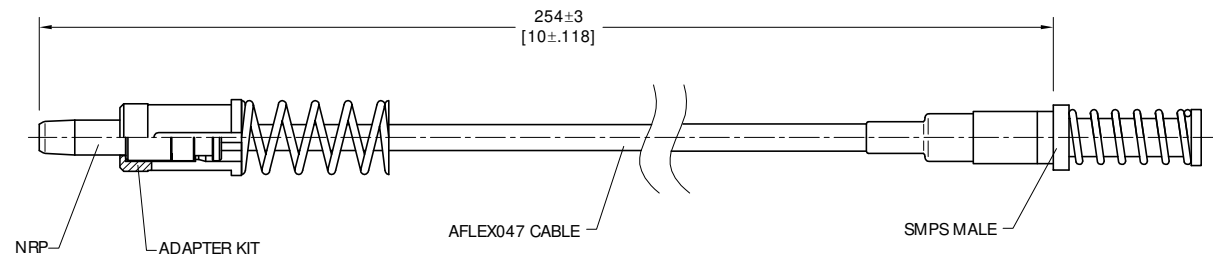

RECOMMENDED MOUNTING



TITLE
 CABLE ASSEMBLY, NanoRF PIN WITH ADAPTER KIT
 TO 2M805 (MICRO 38999) RECEPTACLE SIZE 16 SMPS
 MALE, AFLEX047 CABLE, 10 INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±2%.

| | | | | |
|------|----------------------|-------|------|--|
| VIEW | PART NO. | | | |
| | AF047-NRP-SMPS(M)-10 | | | |
| SIZE | SCALE | SHEET | REV. | |
| A3 | 4:1 | 1/1 | A | |

4

3

2

1