

4



3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-6 GHz
- 3 VSWR: 1.20 MAX.
- 4 INSERTION LOSS: 1.00 dB MAX.

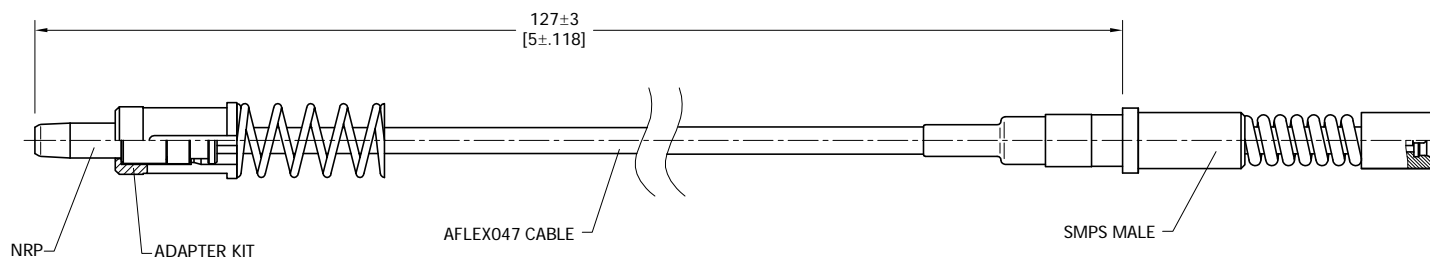

RECOMMENDED MOUNTING

NOTES:

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
- 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
- 4. LENGTH TOLERANCE IS ±2%.



TITLE
 CABLE ASSEMBLY, NanoRF PIN WITH ADAPTER KIT
 TO SMPS MALE, BLIND-MATE FOR M38999 SIZE
 16 CAVITY, AFLEX047 CABLE, 5 INCHES

VIEW



PART NO.

AF047-NRP-SMPS(M)-5

SIZE
A3

SCALE
4:1

SHEET
1/1

REV.
A

4

3

2

1