


**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-40 GHz
- 3 VSWR: 1.40 MAX
- 4 INSERTION LOSS: 1.30 dB MAX
- 5 PHASE-MATCHED IN PAIR: ≤1.5PS

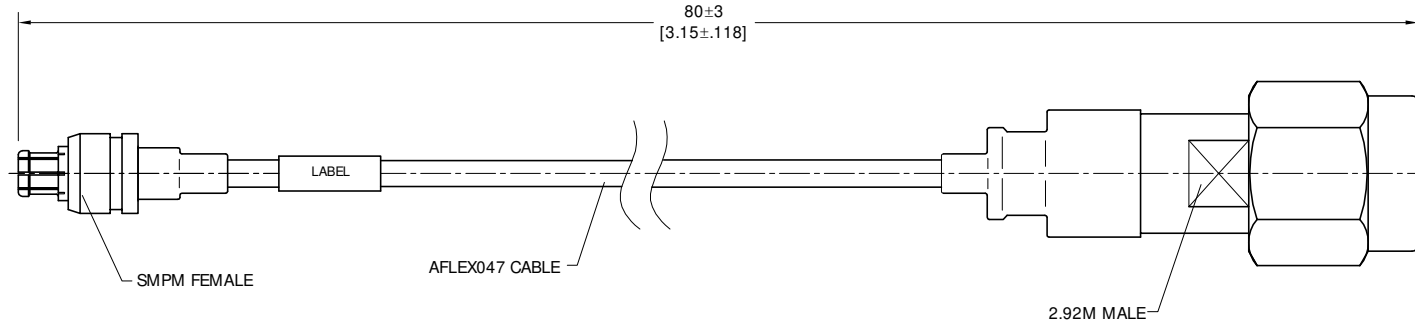

LABEL FOR PER PAIR: 80- P 001 A

- A&B IN PAIR
- S/N(001,002,003...)
- PER PAIR
- CABLE LENGTH 80MM



TITLE  
 CABLE ASSEMBLY, SMPM STRAIGHT FEMALE TO 2.92MM  
 STRAIGHT MALE, AFLEX047 CABLE, 80MM  
 PHASE-MATCHED IN PAIR: ≤1.5PS

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
 4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO.			
	AF047-SMPMF-29M-80MM-PM			
SIZE	SCALE	SHEET	REV.	
A3	4:1	1/1	A	