

4

3

2


1

**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.30 MAX
- 4 INSERTION LOSS: 0.65DB MAX

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55 °C ~ +125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

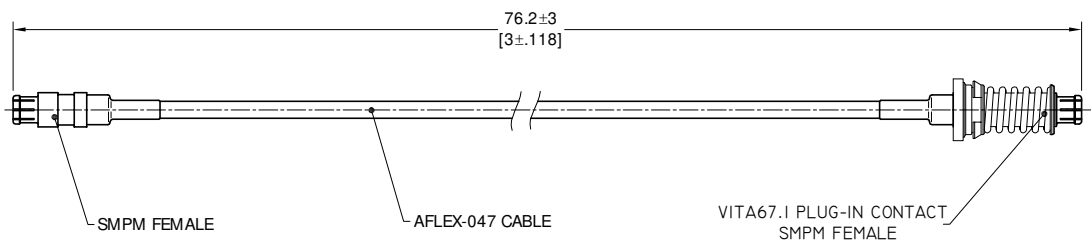

TITLE  
CABLE ASSEMBLY, SMPM STRAIGHT FEMALE TO VITA67.1 PLUG-IN CONTACT SMPM STRAIGHT FEMALE, AFLEX-047 CABLE, 3 INCHES

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME  
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO. AF047-SMPMF-SMPMF-3			
	SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A

4

3

2

1