


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.35 MAX
- 4 INSERTION LOSS: 1.15 dB MAX

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

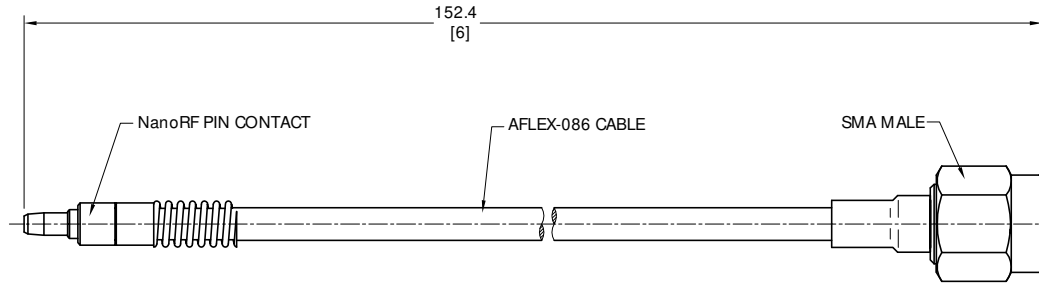

TITLE

CABLE ASSEMBLY, NanoRF PIN TO SMA STRAIGHT MALE
ANO AFLEX-086 CABLE, 6 INCHES

VIEW



PART NO.

AF086-NRP-SMAM-6

SIZE
A3

SCALE
2.5:1

SHEET
1/1

REV.
A

NOTES:

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
- 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
- 4. LENGTH TOLERANCE IS ±2%.