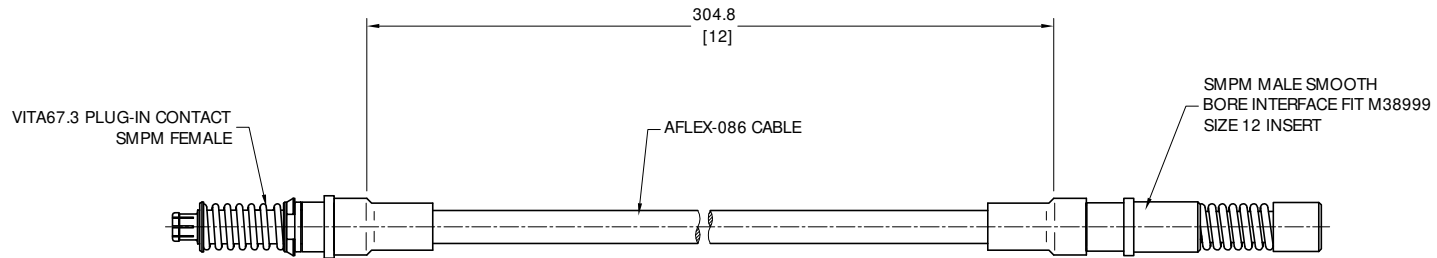


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz
- 3 VSWR: 1.40 MAX. AT DC~26.5 GHz
- 4 INSERTION LOSS: 1.95DB DC~26.5 GHz



ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT



TITLE
CABLE ASSEMBLY, SMPM FEMALE TO SMPM MALE SMOOTH BORE INTERFACE, ANO AFLEX-086 CABLE, 12 INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO. AF086-SMPMF-SMPMM-12			
 	SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A