ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~6 GHz
3 VSWR: 1.20 MAX.
4 INSERTION LOSS: 2.00 dB MAX.

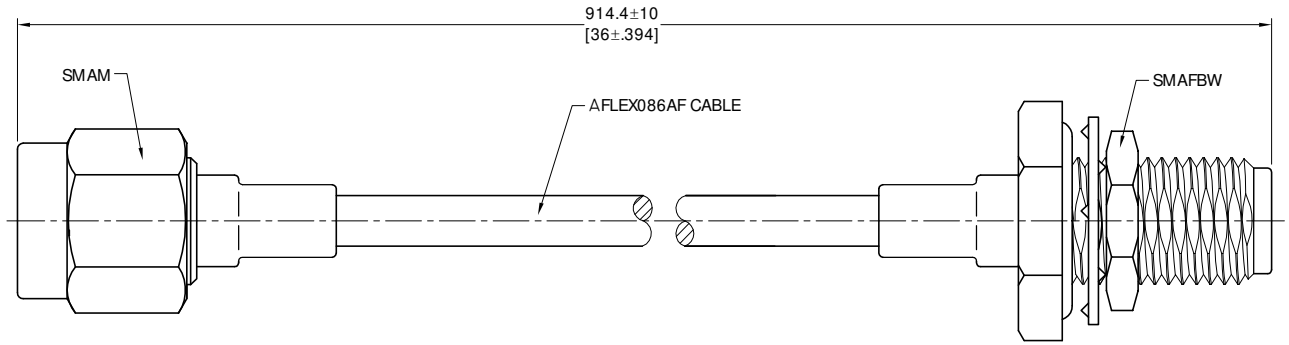



RECOMMENDED MOUNTING HOLE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES
4. LENGTH TOLERANCE IS ±2%.

ANOISON

TITLE
CABLE ASSEMBLY, SMA STRAIGHT MALE TO SMA STRAIGHT BULKHEAD WATERPROOF FEMALE, AFLEX086AF CABLE

VIEW	PART NO.			
	AF086AF-SMAM-SMAFBW-36			
	SIZE	SCALE	SHEET	REV.
	A3	4:1	1/1	A