

4



3

2

1

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.35 MAX
- 4 INSERTION LOSS: 1.65 dB MAX

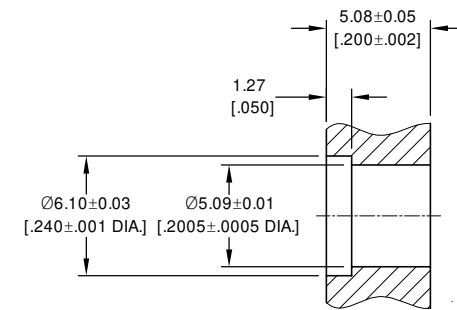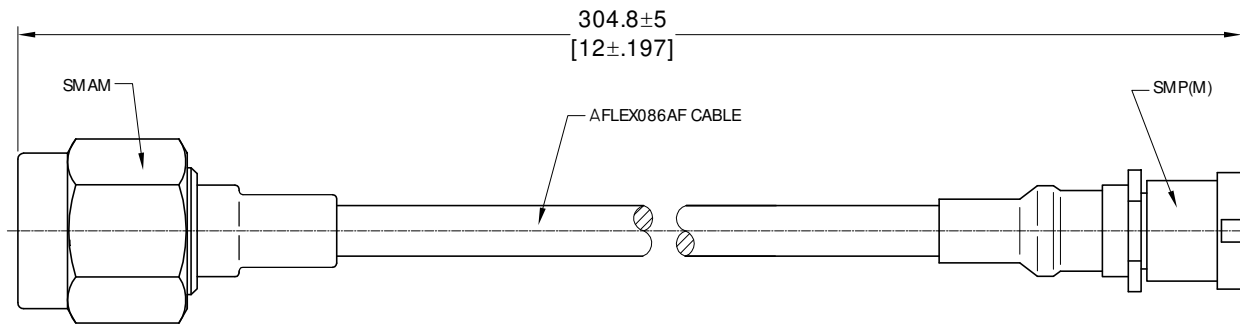

RECOMMENDED MOUNTING HOLE



TITLE
 CABLE ASSEMBLY, SMA STRAIGHT MALE TO SMP
 STRAIGHT MALE LIMITED DETENT, AFLEX086AF CABLE,
 12 INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

AF086AF-SMAM-SMP(M)-12

SIZE
A3

SCALE
4:1

SHEET
1/1

REV.
A

4

3

2

1