

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	ADDED NOTE	08/09/13	J. QU
D	84±5[3.307±.197] WAS 84[3.307]	09/01/16	J. QU

## 1.0 AF250\_I.4W LEADS SPECIFICATION


1.1 VOLTAGE RATIONG: 600

1.2 TEMPERATURE RANGE: -40°C TO +125°C SHORT CIRCUIT OVERLOAD UP TO +280°C

1.3 CONDUCTOR: SILVER PLATED COPPER, 19xØ0.16MM

1.4 INSULATION: TEFLON, OD=1.4MM

1.5 COLOUR: WHITE

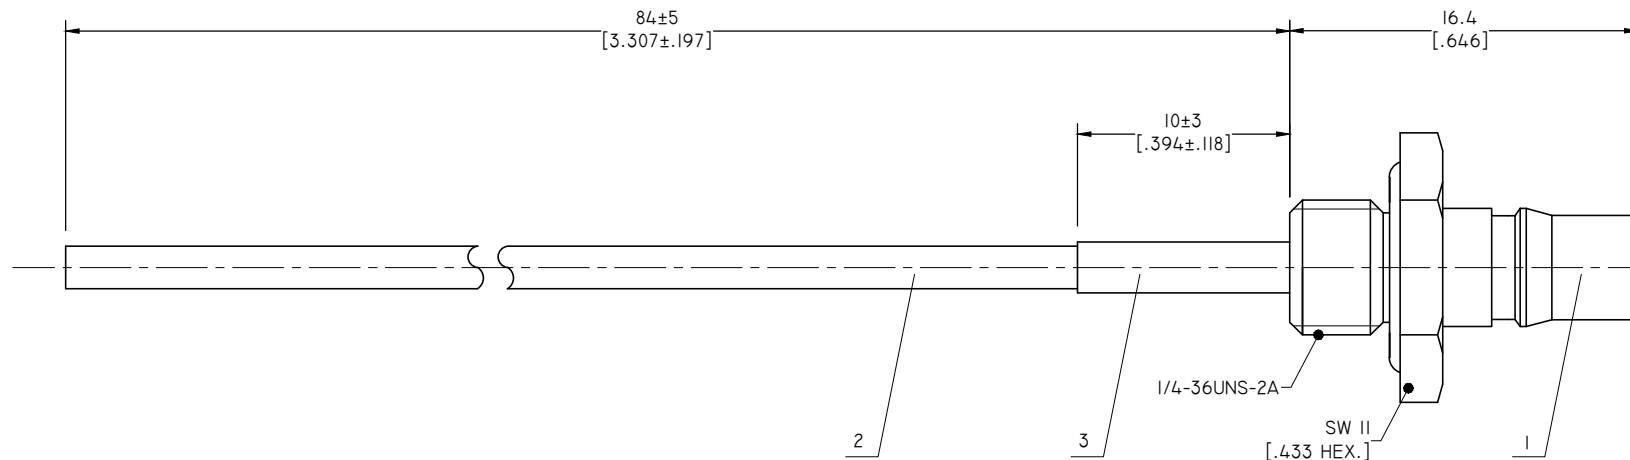

3	ANO 8.687.101	HEAT-SHRINK TUBING	I
2	AF250_I.4W	SEE TABLE	I
1	ANO 2612-2059	QMA STRAIGHT FEMALE BULKHEAD MOUNT WATERPROOF	I
SEQUENCE NUMBER	PART NO.	DESCRIPTION	QTY

DRAWN	L. YANG	DATE	09/01/16
CHECKED	X. B. YANG	DATE	09/01/16
APPROVED	J. QU	DATE	09/01/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

TITLE  
FLEXIBLE CABLE ASSEMBLY WITH QMA FEMALE CONNECTOR

VIEW



PART NO.

AF250\_I.4W-QMAF-84MM

SIZE  
A3SCALE  
4:1SHEET  
1/1REV.  
D

4

3

2

1