

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/29/13	J. QU
B	DRAWING FORMAT CHANGED	08/29/17	J. QU

**MATERIAL & FINISH:**



1. OUTER CONTACT: BRASS, GOLD PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. RING: BERYLLIUM COPPER ALLOY, GOLD PLATED
4. INSULATOR: PTFE

**ENVIRONMENTAL DATA:**

1. TEMPERATURE RANGE: -55 ~+125
2. 2011/65/EU RoHS): COMPLIANT

**ELECTRICAL SPECIFICATIONS:**

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6GHZ
3. VSWR: 1.30 MAX.

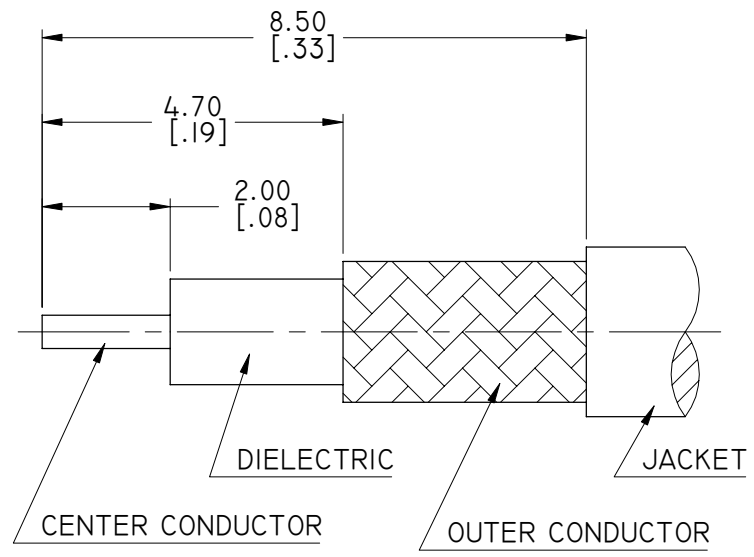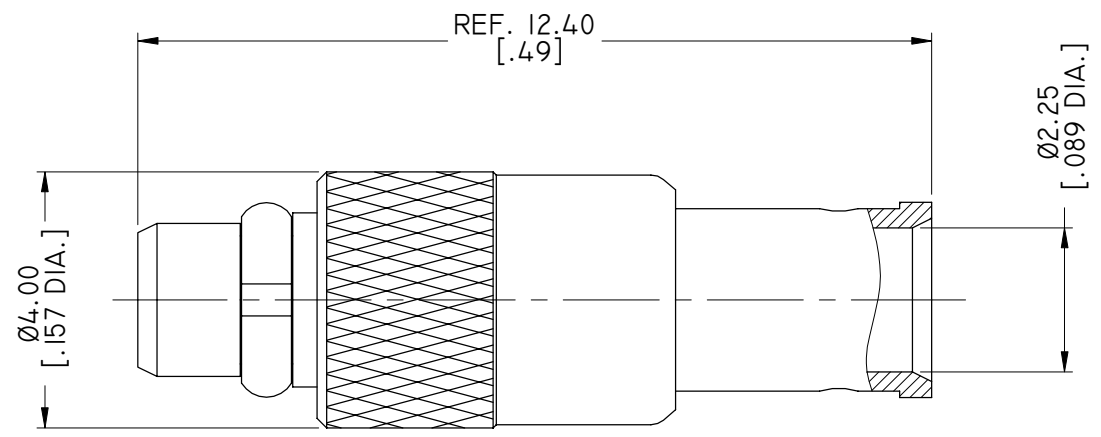

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	08/29/17
CHECKED	L. YANG	DATE	08/29/17
APPROVED	J. QU	DATE	08/29/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
MMCX STRAIGHT MALE SOLDER FOR ANO HF086FEP CABLE			
VIEW	PART NO.		
	ANO IIII-2030		
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	B