

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 SPRING: STAINLESS STEEL, PASSIVATED
- 5 CENTER CONTACT HOOD: BRASS, GOLD PLATED
- 6 SNAP RING: BERYLLIUM COPPER ALLOY, CORROSION RETARDANT PHOSPHATE PLATED



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC ~ 28GHz
- 3 VSWR: 1.26 MAX. @ DC ~ 18GHz
1.35 MAX. @ 18 ~ 28GHz
- 4 INSERTION LOSS: 0.40 dB MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/28/24	J. Q

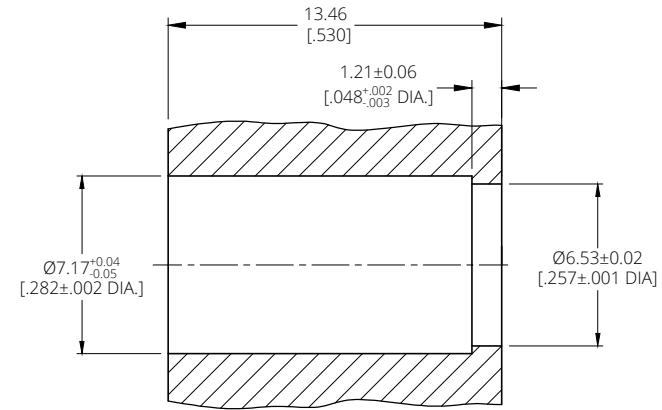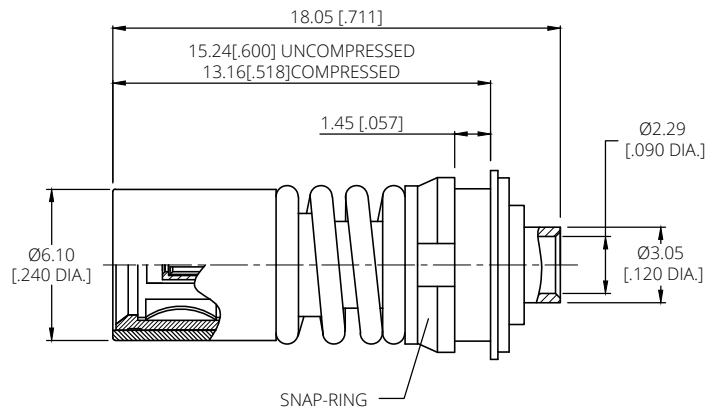

RECOMMEND MOUNTING HOLE

DRAWN	Y. H	DATE	08/28/24		TITLE BMMA STRAIGHT JACK (FEMALE SOCKET) FLOAT SOLDER FOR TFLEX405/AFLEX086
CHECKED	L. Y	DATE	08/28/24		
APPROVED	J. Q	DATE	08/28/24		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD		VIEW	PART NO. ANO 1212-2003
XX	±0.13 [.005"]				SIZE A3
X	±0.20 [.008"]				SCALE 5:1
X	±0.50 [.019"]				SHEET 1/1
X°	±1°				REV. A
X"	±2°				

4

3

2

1