

1.0 MATERIAL & FINISH:

- 1.1 BODY: BRASS, GOLD PLATED
- 1.2 OUTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.4 INSULATOR: PTFE



2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+125°C
- 2.2 2011/65/EU (RoHS): COMPLIANT
- 2.3 DURABILITY: 500 CYCLES MIN.

3.0 ELECTRICAL DATA:

- 3.1 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~6 GHz
- 3.3 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS (FOR 1MINUTE)
- 3.4 CONTACT RESISTANCE: 5mΩ (CENTER CONTACT)  
1mΩ (OUTER CONTACT)
- 3.5 VOLTAGE RATING: 500V
- 3.6 INSULATION RESISTANCE: 1000mΩ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/27/13	J. QU
B	MODIFY DRAWINGS	04/21/17	J. QU

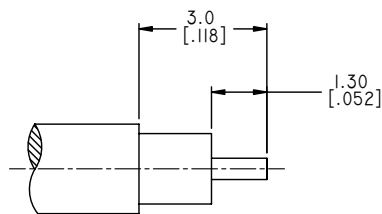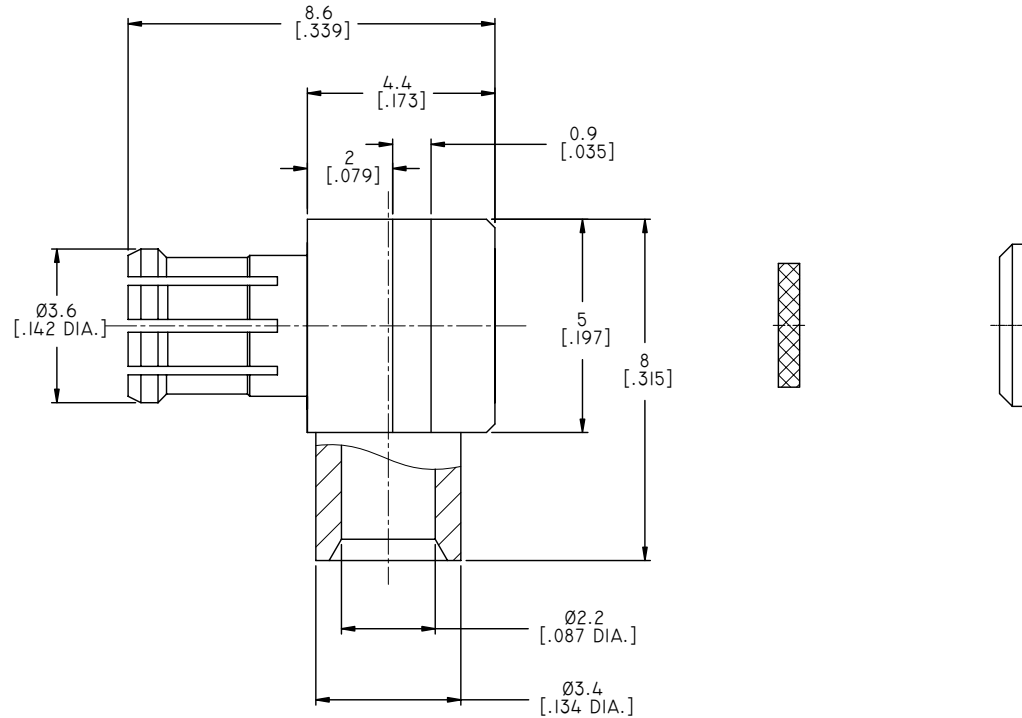

CABLE STRIPPING DIMENSIONS

DRAWN	L. YANG	DATE	04/21/17
CHECKED	X. B. YANG	DATE	04/21/17
APPROVED	J. QU	DATE	04/21/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.08 [.003"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
MCX RIGHT ANGLE MALE SOLDER FOR .086 CABLE			
VIEW		PART NO.	
		ANO 1321-2004	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	B