

MATERIAL & FINISH:

- 1 CENTER CONTACT: PHOSPHOR BRONZE, GOLD
- 2 OUTER CONTACT: STAINLESS STEEL, PASSIVSTED
- 3 INSULATOR: PTFE

ELECTRICAL DATA:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~18 GHZ
- 3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS
- 4. INSULATION RESISTANCE: 5000 MΩ MIN.



ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

MACHANICAL DATA:

- 1. MECHANICAL DURABILITY: 1000 CYCLES MIN.
- 2. INTERFACE: PER MIL-STD-348

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/26/14	J. QU
B	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	09/21/18	J. QU

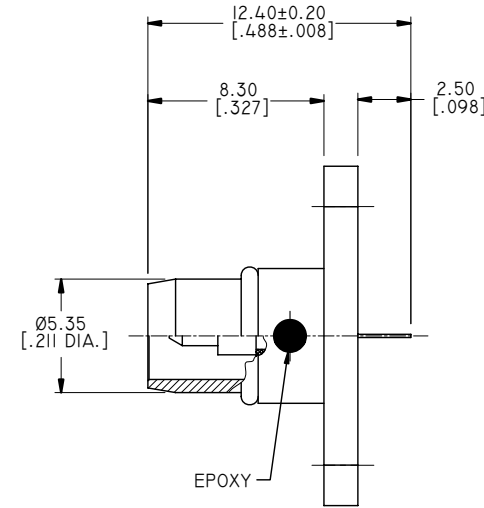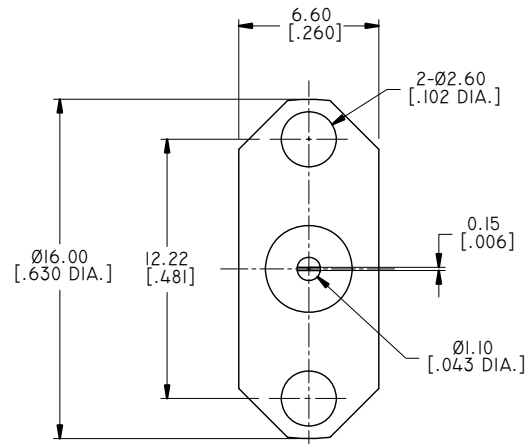

DRAWN	X. B. YANG	DATE	09/21/18
CHECKED	W. YANG	DATE	09/21/18
APPROVED	J. QU	DATE	09/21/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
BMA STRAIGHT PLUG SLIDE-ON CONNECTOR SOLDER ATTACHMENT, 2 HOLE FLANGE MOUNT STUB TERMINAL .481 INCH HOLE SPACING, TAB CONTACT

VIEW	PART NO. ANO 1411-3003			
SIZE A3	SCALE 4:1	SHEET 1/1	REV. B	