

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 FERRULE: BRASS, GOLD PLATED
- 4 INSULATOR: PTFE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.25 MAX. MATED PAIR
- 4 INSERTION LOSS: .06 X √F (GHz)
- 5 DWV: 1000 VRMS

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/19/24	J Q

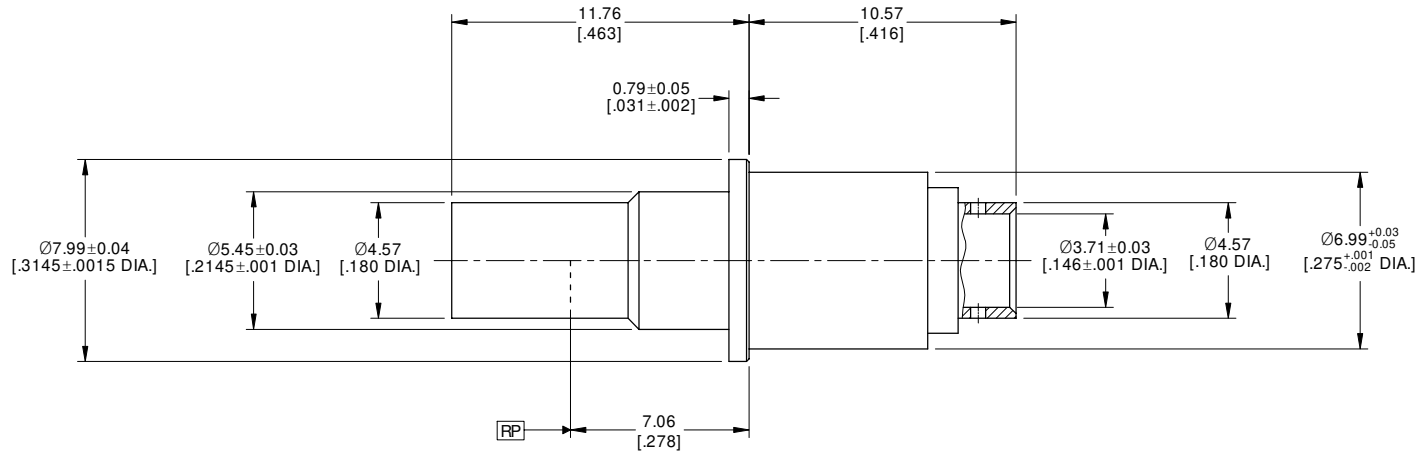

DRAWN	X. Y	DATE	04/19/24
CHECKED	W. Y	DATE	04/19/24
APPROVED	J Q	DATE	04/19/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
.X°	±2°		



TITLE			
BMZ STRAIGHT FEMALE TO .141 CABLE FOR M38999 SIZE 8 CAVITY, DC~18GHz			
VIEW		PART NO.	
		ANO 1412-2034	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A

4

3

2

1