

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 CRIMP FERRULE: COPPER, NICKEL PLATED
- 4 INSULATOR: PTFE

MECHANICAL DATA:

- 1 INTERFACE STANDARDS: IEC60169-10
MIL-STD-348A

ENVIRONMENTAL DATA:





- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~4 GHz

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/23/15	J. QU
B	18.90 [.744] WAS 18.00 [.709]	07/30/15	J. QU
C	DRAWING FORMAT CHANGED	07/05/18	J. QU

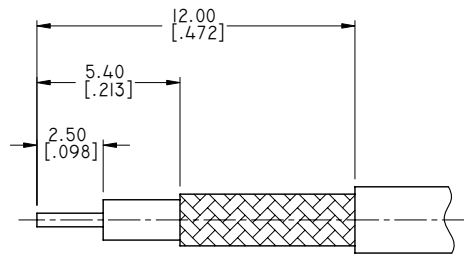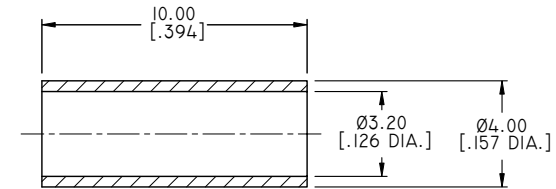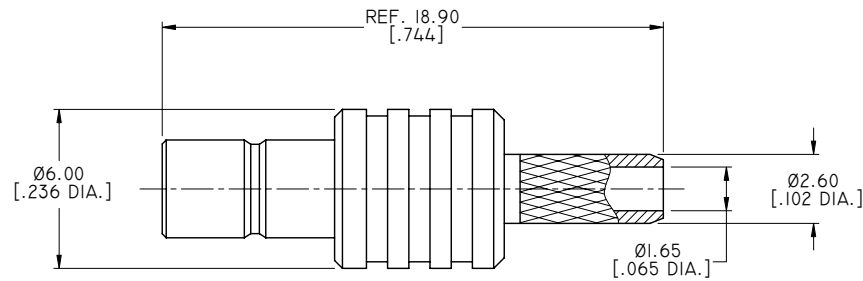

CABLE STRIPPING DIMENSIONS



CRIMP DIE

DRAWN	X. B. YANG	DATE	07/05/18
CHECKED	W. YANG	DATE	07/05/18
APPROVED	J. QU	DATE	07/05/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
SMB STRAIGHT JACK CRIMP FOR LMRI00/RG316/RG174 CABLE			
VIEW		PART NO.	
		ANO 1712-2032	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	C