

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: HIGH TEMPERATURE POLYMER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-67 GHz

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/07/24	J. Q

D

D

C


C

B

B

A

A

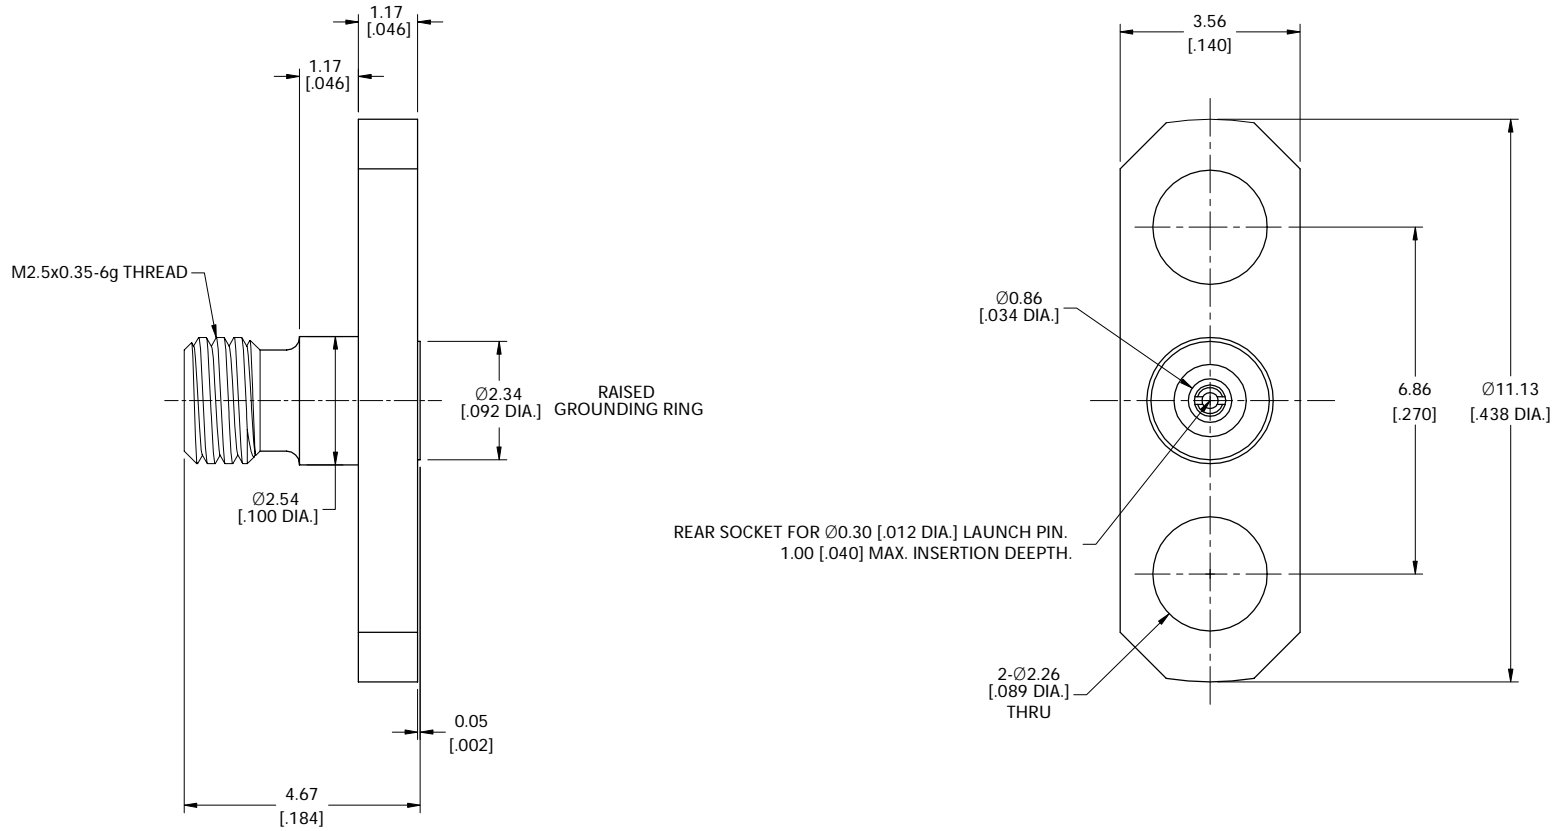

DRAWN	X. Y	DATE	03/07/24		
CHECKED	W. Y	DATE	03/07/24		
APPROVED	J. Q	DATE	03/07/24		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD		TITLE	
XX ±0.13 [005"] X ±0.20 [008"] X ±0.50 [019"] X° ±1° X° ±2°				0.9MM FEMALE, 2 HOLE FLANGE MOUNT, .438 LONG REAR SOCKET TO ACCEPT Ø0.30 [012 DIA] PIN	
		VIEW		PART NO.	
				ANO 2012-3002	
		SIZE	SCALE	SHEET	REV.
		A3	10:1	1/1	A

4

3

2

1