

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/21/19	J. QU
B	CHANGED ELECTRICAL DATA	04/28/24	J. QU
	41.8 WAS 49.8, 10.6 WAS 11.0		

**MATERIAL & FINISH:**


- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 5 RADIATOR: ALUMINIUM, BLACK

**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~26.5 GHz
- 3 VSWR: 1.30 MAX.
- 4 AVERAGE POWER: MAXIMUM POWER 30 WATTS AVERAGE TO 25°C AMBIENT TEMPERATURE, DERATED LINEARLY TO 3W @ 125°C
- 5 PEAK POWER: MAXIMUM POWER 200 W (5μS PULSE WIDTH WITH THE MAXIMUM 10% DUTY CYCLE)
- 6 ATTENUATOR ACCURACY: SEE TABLE

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

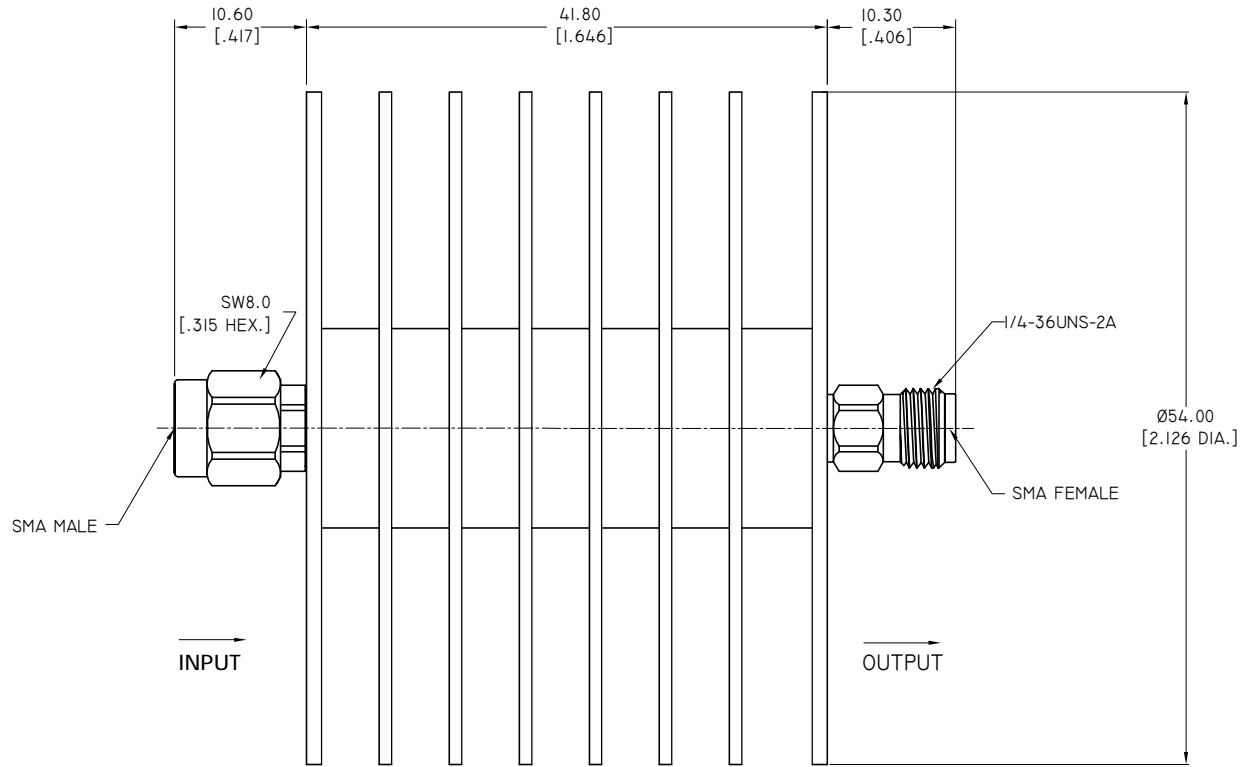

PART NO.	ATTENUATION VALUES & ACCURACY		
	10 DB	20 DB	30 DB
ANO 21-3001-XX	±1.5 DB	±1.5 DB	±1.5 DB
NOTE: XX REFER TO ATTENUATION VALUE IN DB			

DRAWN	P. CHEN	DATE	04/28/24
CHECKED	W. YANG	DATE	04/28/24
APPROVED	J. QU	DATE	04/28/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.25 [.010"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
ATTENUATOR SMA MALE TO SMA FEMALE 30 WATT, UNI DIRECTIONAL, DC~26.5GHZ			
VIEW	PART NO.		
	ANO 21-3001-XX		
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	B