

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, SEE TABLE
- 2 CENTER CONTACT: BRASS, SEE TABLE
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, SEE TABLE
- 5 GASKET: SILICONE RUBBER


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.20 MAX.

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -65°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
D	PART NO. ADDED	11/13/17	J. Q
E	CHANGED FINISH	12/29/19	J. Q
F	CHANGED ELECTRICAL DATA	05/07/25	J. Q
G	CHANGED LENGTH 22.70 WAS 21.70	06/13/25	J. Q

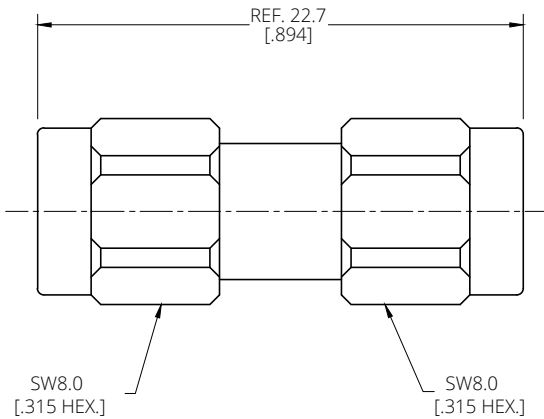


PART NUMBER	PART	FINISH
ANO 211-211-1007	BODY	NICKEL
	CENTER CONTACT	GOLD
	COUPLING NUT	NICKEL
ANO 211-211-1007-1	BODY	GOLD
	CENTER CONTACT	GOLD
	COUPLING NUT	GOLD
ANO 211-211-1007-2	BODY	ALBALOY
	CENTER CONTACT	SILVER
	COUPLING NUT	ALBALOY

DRAWN	Y. H	DATE	06/13/25
CHECKED	L. Y	DATE	06/13/25
APPROVED	J. Q	DATE	06/13/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
.X°	±0.50 [.019"]		
.X°	±1°		
.X°	±2°		



TITLE
ADAPTER, SMA MALE TO SMA MALE

VIEW


PART NO.
ANO 211-211-1007

SIZE A3	SCALE 4:1	SHEET 1/1	REV. G
------------	--------------	--------------	-----------

4

3

2

1