


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	See Schedule	See Schedule
Coupling Nut	See Schedule	See Schedule
Retaining Ring	Beryllium Copper Alloy	Nickel
Gasket	MVQ(Silicone Rubber)	————
Insulator	PTFE/PEI	————

### Technical Data

1. Impedance: 50 Ω
2. Temp. range: -55 °C ~ +125 °C
3. Frequency range: DC~18GHz
4. VSWR: 1.25 Max.
5. Insertion Loss: 0.25 dB Max.

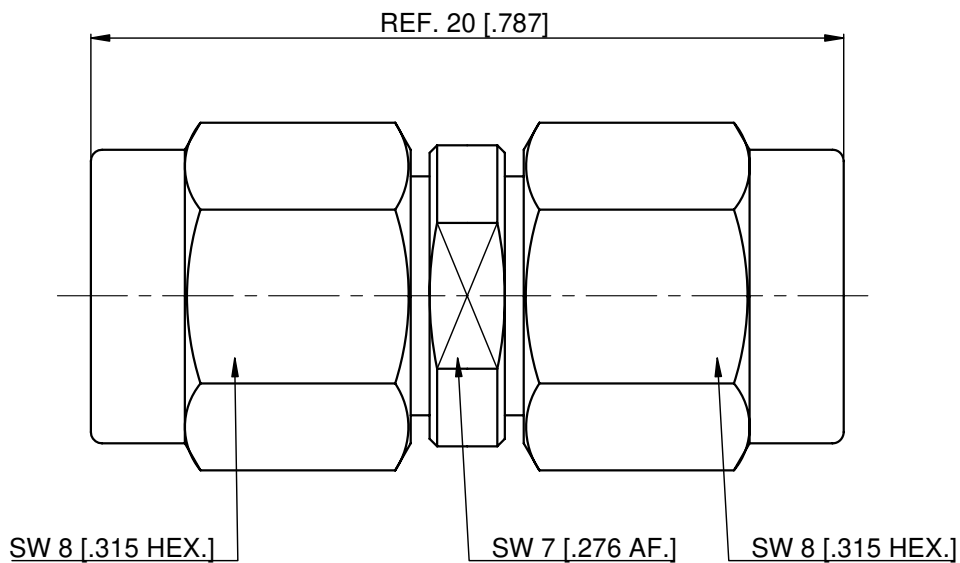

Part Number	Part	Material	Finish
ANO 211-211-1170	Body/Coupling Nut	Brass	Albaloy
ANO 211-211-1170A		Stainless Steel	Passivated

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Material&Finish Changed	————	04/15/13	C	Drawn: L. Yang 04/15/13
Material&Finish Changed	————	11/16/12	B	Checked: H. Zhang 04/15/13
Description	Ecn.No	Date	Rev	Approved: J. Qu 04/15/13

Title:

## Adapter, SMA Male to SMA Male



Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only.

Unless Otherwise Specified tolerance are:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

View:



Part No:

ANO 211-211-1170

Size:	Scale:	Sheet:	Rev:
A4	5:1	1/1	C