

MATERIAL & FINISH:

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. COUPLING NUT: STAINLESS STEEL, PASSIVATED
4. INSULATOR: PTFE & PEI


ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -55°C~+155°C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~26.5GHZ
3. VSWR: 1.20 MAX. AT DC~18GHZ
1.35 MAX. AT 18GHZ~26.5GHZ
4. DIELECTRIC WITHSTANDING VOLTAGE: 500 V MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/18/13	J. QU
B	STRUCTURE CHANGED	10/29/15	J. QU

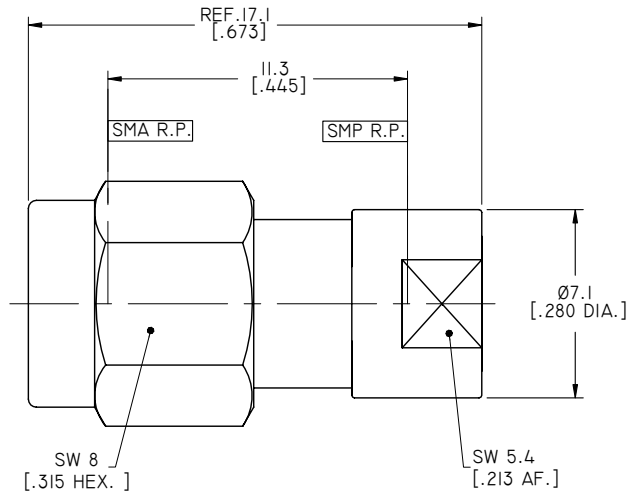

P/N	TYPE
ANO 211-931-1143-1	FULL DETENT
ANO 211-931-1143-2	LIMITED DETENT
ANO 211-931-1143-3	SMOOTH BORE

DRAWN P. CHEN	DATE 10/29/15		
CHECKED X. B. YANG	DATE 10/29/15		
APPROVED J. QU	DATE 10/29/15		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
TITLE ADAPTER, SMA MALE TO SMP MALE		VIEW 	PART NO. ANO 211-931-1143
SIZE A3	SCALE 5:1	SHEET 1/1	REV. B