

MATERIAL & FINISH

- 1 BODY: SEE TABLE
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 COUPLING NUT: SEE TABLE
- 4 CRIMP FERRULE: BRASS, NICKEL PLATED
- 5 INSULATOR: PTFE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-6GHZ
- 3 VSWR: 1.30 MAX.





ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT


MECHANICAL DATA:

- 1 CABLE RETENTION: 40 POUNDS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	ADDED TECHNICAL DATA	03/02/13	J. QU
G	CABLE STRIPPING DIMENSIONS CHANGED	07/14/15	J. QU
H	PART NO. ANO 2111-2006-1 AND ANO 2111-2006-2 ADDED	09/20/19	J. QU

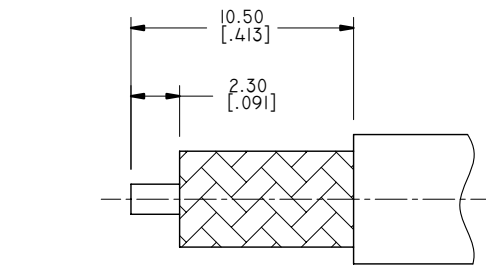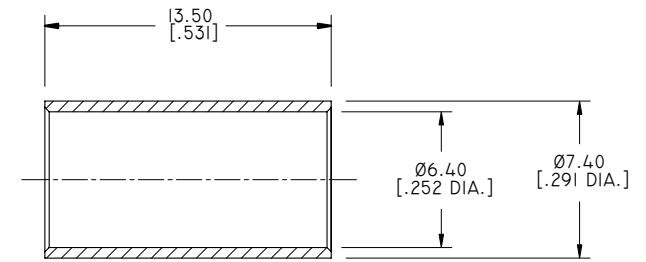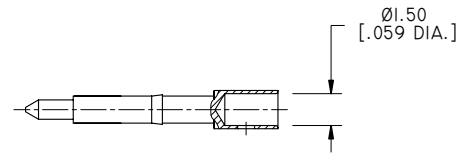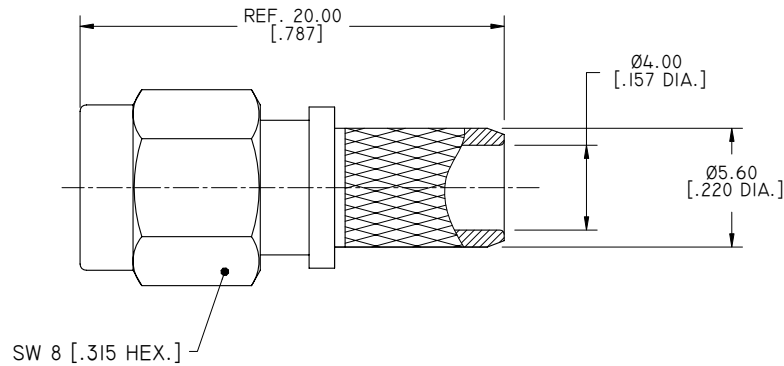

HEX. CRIMP TOOL



CABLE STRIPPING DIMENSIONS

CRIMP WIDTH: 12.70 [.500]

TABLE

PART NO.	PARTS	MATERIA & FINISH
ANO 2111-2006		BRASS, NICKEL PLATED
ANO 2111-2006-1	BODY & COUPLING NUT	STAINLESS STEEL, PASSIVATED
ANO 2111-2006-2		BRASS, GOLD PLATED

DRAWN	X. B. YANG	DATE	09/20/19
CHECKED	L. YANG	DATE	09/20/19
APPROVED	J. QU	DATE	09/20/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
SMA STRAIGHT MALE CRIMP FOR LMR240 CABLE

VIEW	PART NO. ANO 2111-2006			
	SIZE A3	SCALE 4:1	SHEET 1/1	REV. H