

4 3 2 1

MATERIAL & FINISH:

- 1. BODY : SEE TABLE
- 2. CENTER CONTACT: BRASS, GOLD PLATED
- 3. COUPLING NUT: SEE TABLE
- 4. RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- 5. INSULATOR: PTFE
- 6. GASKET: SILICONE RUBBER


ELECTRICAL DATA:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~26.5 GHZ
- 3. VSWR: 1.10 MAX. AT DC~12 GHZ
1.20 MAX. AT 12~18 GHZ
1.30 MAX. AT 18~26.5 GHZ

ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -40 °C~+85 °C
- 2. 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
J	FREQUENCY RANGE & VSWR CHANGED	08/03/23	J. Q
H	FREQUENCY RANGE & VSWR CHANGED	10/29/24	J. Q
R	REF. 10.80 WAS REF. 10.60	12/04/24	J. Q

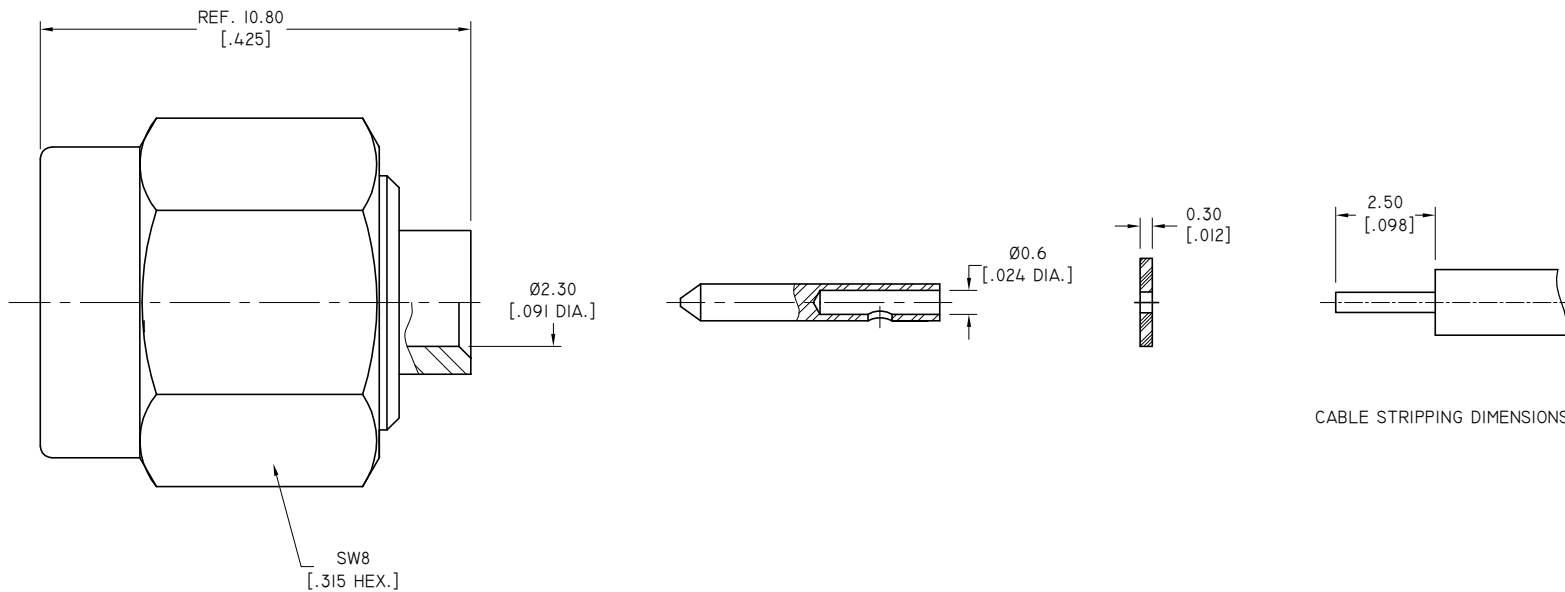

PART NO.	MATERIAL & FINISH	
	BODY	COUPLING NUT
ANO 2111-2055-1	BRASS, GOLD PLATED	BRASS, GOLD PLATED
ANO 2111-2055-2	BRASS, GOLD PLATED	STAINLESS STEEL, PASSIVATED
ANO 2111-2055-3	STAINLESS STEEL, GOLD PLATED	STAINLESS STEEL, PASSIVATED

DRAWN	P. C	DATE	12/04/24
CHECKED	L. Y	DATE	12/04/24
APPROVED	J. Q	DATE	12/04/24



TITLE
SMA STRAIGHT MALE SOLDER FOR .086 CABLE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:
 .XX ±0.13 [.005"]
 .X ±0.20 [.008"]
 X ±0.50 [.019"]
 .X° ±1°
 X° ±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
 COPYRIGHT © 2024 ANOISON

VIEW	PART NO. ANO 2111-2055		
SIZE A3	SCALE 8:1	SHEET 1/1	REV. R

4 3 2 1