

**MATERIAL & FINISH:**

- 1 BODY: SEE TABLE
- 2 COUPLING NUT: SEE TABLE
- 3 CENTER CONTACT: BRASS, GOLD PLATED
- 4 CRIMP FERRULE: COPPER, NICKEL PLATED
- 5 RETINING RING: BERYLLIUM COPPER, NICKEL PLATED
- 6 INSULATOR: PTFE
- 7 GASKET: MVQ (SILICONE RUBBER)






**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.20 MAX. AT DC~3 GHZ
- 4 WITHSTANDING VOLTAGE: 1000V

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -65°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/05/16	J. QU

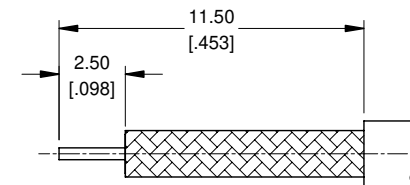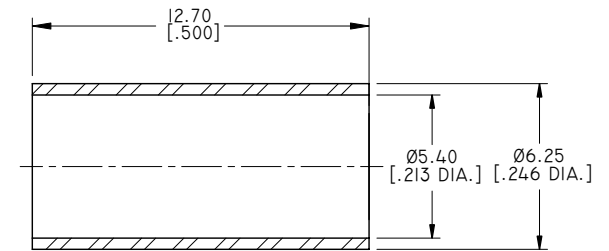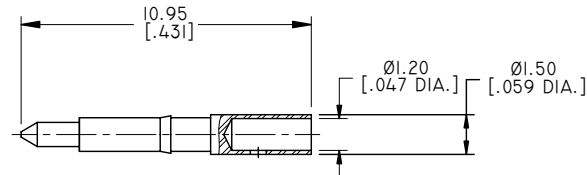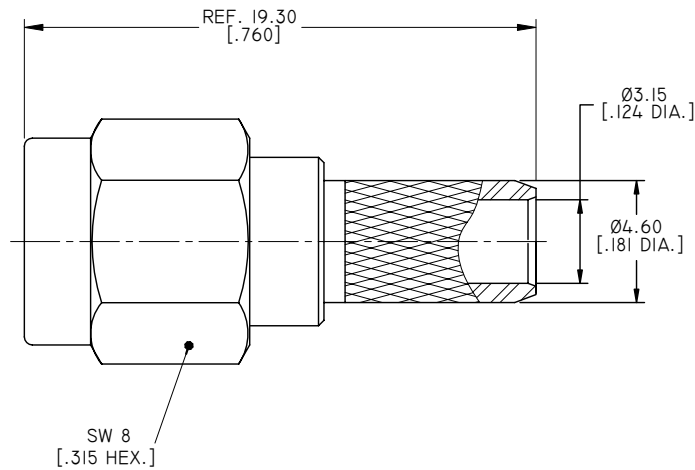

CABLE STRIPPING DIMENSIONS

CRIMP WIDTH: 10 [.394]

PART NUMBER	BODY	COUPLING NUT
ANO 2111-2294	BRASS, NICKEL PLATED	BRASS, NICKEL PLATED
ANO 2111-2294-1	BRASS, GOLD PLATED	BRASS, GOLD PLATED
ANO 2111-2294-2	BRASS, GOLD PLATED	STAINLESS STEEL, PASSIVATED

DRAWN	P. CHEN	DATE	05/05/16
CHECKED	L. YANG	DATE	05/05/16
APPROVED	J. QU	DATE	05/05/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
SMA STRAIGHT MALE CRIMP FOR LMR200 CABLE			
VIEW		PART NO.	
		ANO 2111-2294	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A