

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4 RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- 5 INSULATOR: PTFE & PEI



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~27 GHZ
- 3 VSWR: 1.10 MAX. AT DC~18 GHZ
1.15 MAX. AT 18~27 GHZ
- 4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/28/17	J. QU

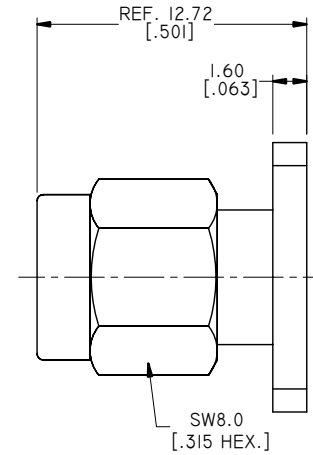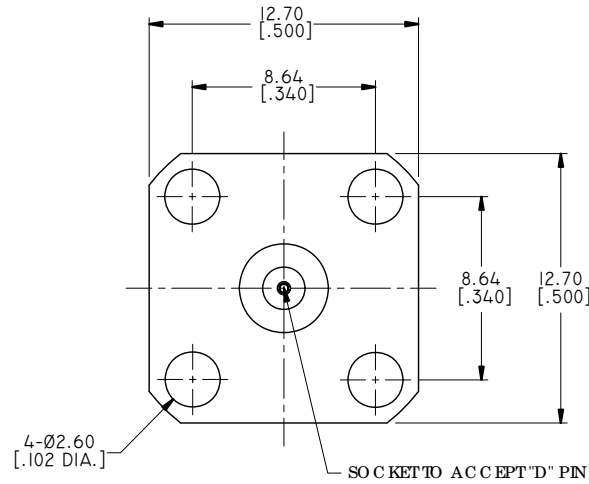

PART NO.	D	PIN DEPTH MAX.
ANO 2111-3440-1	Ø0.23 [.009 DIA.]	1.65 [.065]
ANO 2111-3440-2	Ø0.30 [.012 DIA.]	1.90 [.075]
ANO 2111-3440-3	Ø0.38 [.015 DIA.]	2.54 [.100]
ANO 2111-3440-4	Ø0.46 [.018 DIA.]	2.54 [.100]
ANO 2111-3440-5	Ø0.51 [.020 DIA.]	2.54 [.100]
ANO 2111-3440-6	Ø0.91 [.036 DIA.]	2.54 [.100]

DRAWN	X. B. YANG	DATE	03/28/17
CHECKED	L. YANG	DATE	03/28/17
APPROVED	J. QU	DATE	03/28/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.08 [.003"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
SMA STRAIGHT MALE, 4 HOLE FLANGE MOUNT
FIELD REPLACEABLE

VIEW	PART NO. ANO 2111-3440		
	SIZE A3	SCALE 4:1	SHEET 1/1
		REV. A	