

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, GOLD PLATED
- 5 RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHZ
- 3 WITHSTANDING VOLTAGE: 1000 VRMS MIN.
- 4 VOLTAGE: 500 VRMS AT SEA LEVEL
- 5 VSWR: <1.07 AT DC~8 GHZ
- 6 DURABILITY: >200 CYCLES

APPLICABLE STANDARDS:

MIL-STD-348A

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/24/17	J. QU

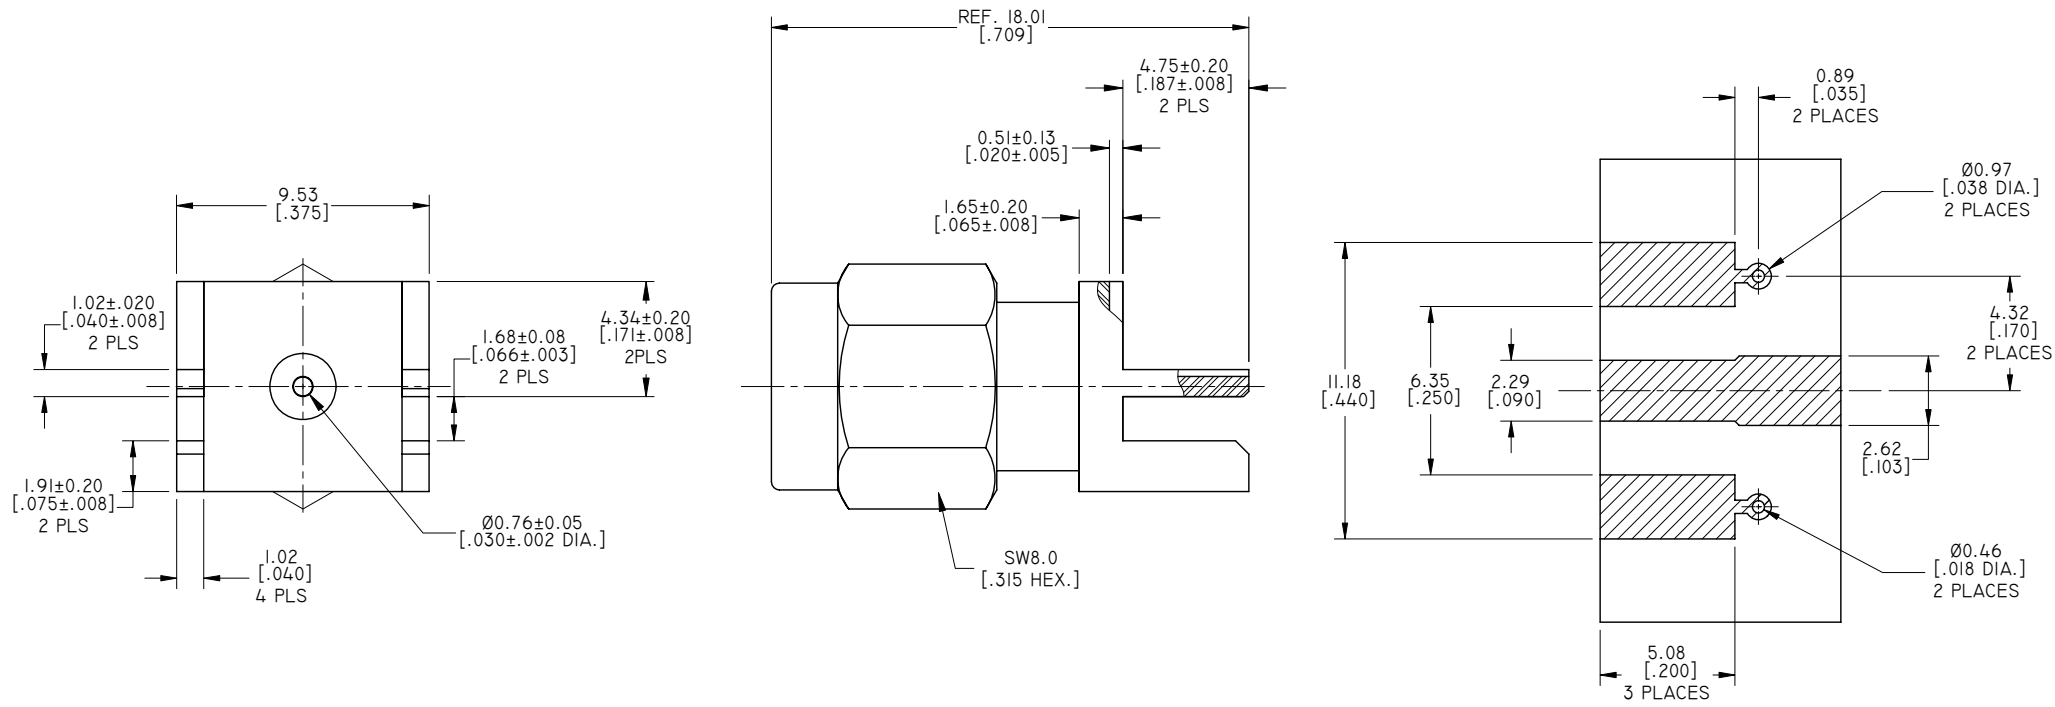

RECOMMENDED PCB LAYOUT BOARD THICKNESS 1.57 [.062]

DRAWN	X. B. YANG	DATE	01/24/17
CHECKED	P. CHEN	DATE	01/24/17
APPROVED	J. QU	DATE	01/24/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	± 0.13 [.005"]		
.X	± 0.20 [.008"]		
X	± 0.50 [.019"]		
.X°	$\pm 1^\circ$		
X°	$\pm 2^\circ$		

ANOISON
...we create connection for technologies

TITLE: SMA END LAUNCH MALE FOR .062 PCB RECEPTACLE-TAB CONTACT

VIEW:

PART NO.: ANO 2111-4229

SIZE	A3	SCALE	5:1	SHEET	1/1	REV.	A
------	----	-------	-----	-------	-----	------	---