

**MATERIAL & FINISH:**

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 SOLDER FERRULE: BRASS, GOLD PLATED
- 3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 INSULATOR: PTFE

**ELECTRICAL DATA:**





- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHz
- 3 VSWR: 1.25 TYP. \*

**ENVIRONMENTAL DATA:**


- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

**REVISIONS**

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/23/17	J. Q
B	RECOMMENDED MOUNTING HOLE: Ø6.50 [.256 DIA.] WAS Ø4.20 [.165 DIA.]	06/11/25	J. Q

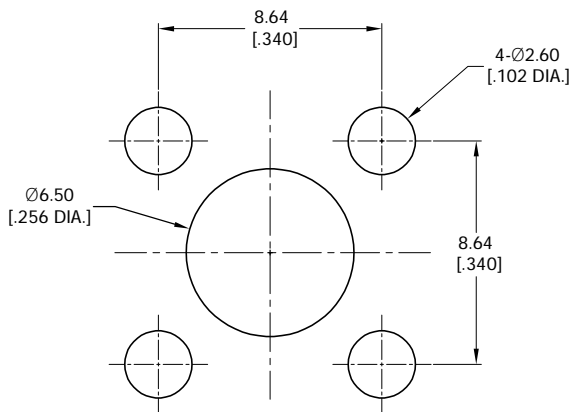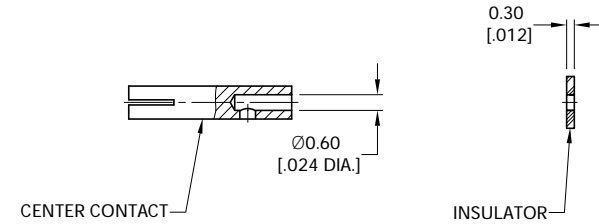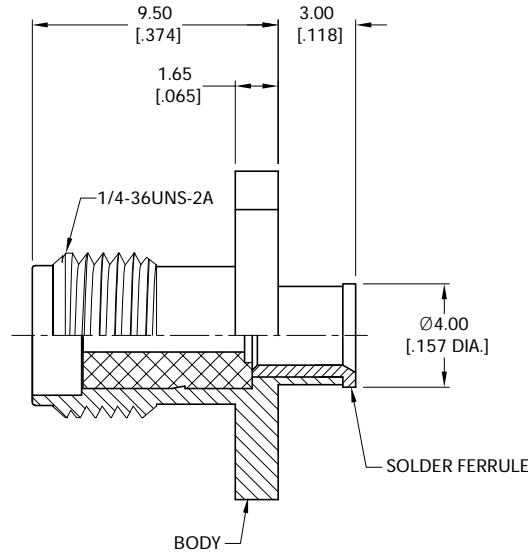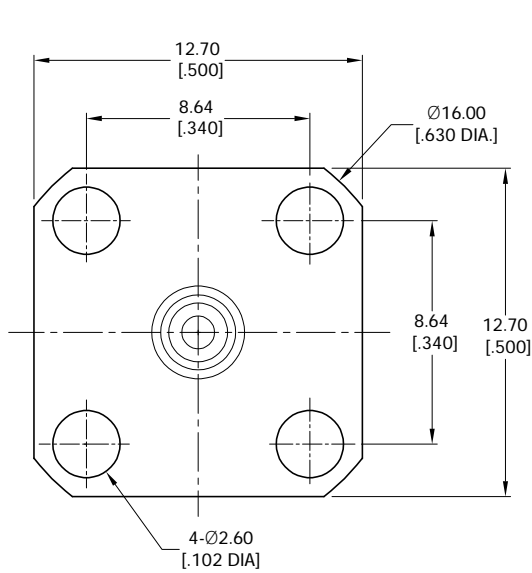

RECOMMENDED MOUNTING HOLE



CABLE STRIPPING DIMENSIONS

\*USERS ARE CAUTIONED THAT PERFORMANCE IS DEPENDENT ON THE SPECIFIC CABLE SELECTED AND CABLE PREPARATION AND TERMINATION WHICH IS BEYOND THE CONTROL OF ANOISON ELECTRONICS.

DRAWN	X. Y	DATE	06/11/25	
CHECKED	W. Y	DATE	06/11/25	
APPROVED	J. Q	DATE	06/11/25	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>				<b>TITLE</b> SMA FEMALE, 4 HOLE FLANGE MOUNT .340 INCH HOLE SPACING, SOLDER FOR .086 CABLE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD</small>				<b>VIEW</b> 
				<b>PART NO.</b> ANO 2112-3467
		<b>SIZE</b> A3	<b>SCALE</b> 5:1	<b>SHEET</b> 1/1
				<b>REV.</b> B