MATERIAL & FINISH:
1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PTFE & PEI

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+125℃
2 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~26.5 GHz

MECHANICAL DATA:
1 DURABILITY: >500 CYCLES

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/24/19	J. QU

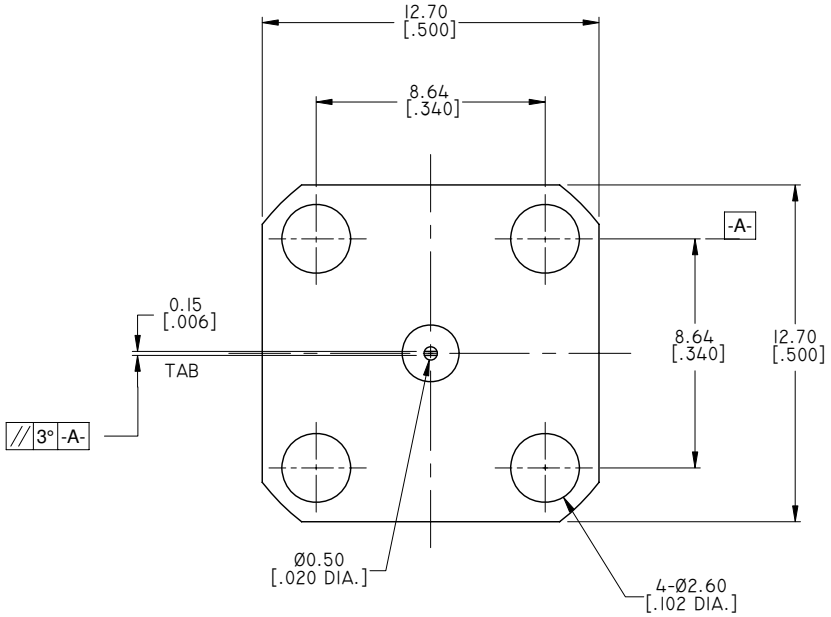

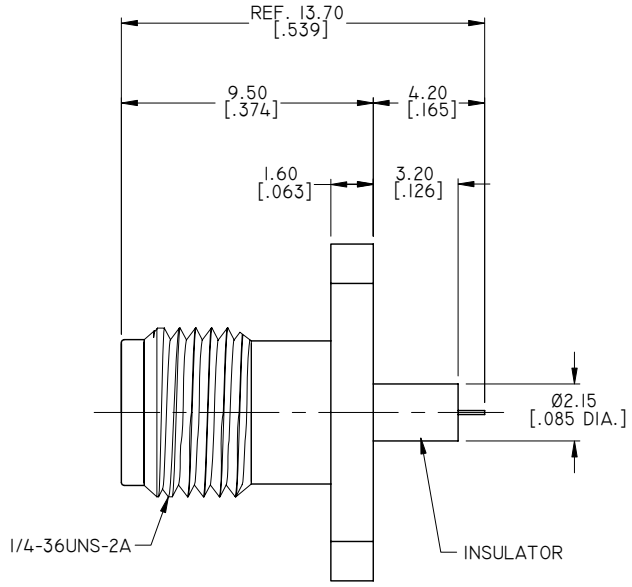

DRAWN	X. B. YANG	DATE 05/24/19
CHECKED	W. YANG	DATE 05/24/19
APPROVED	J. QU	DATE 05/24/19

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD

ANOISON
...we create connection for technologies

TITLE
SMA FEMALE, 4 HOLE, .500 SQ. FLANGE MOUNT, TAB CONTACT

VIEW

PART NO. ANO 2112-3530

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A