MATERIAL & FINISH:
1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PTFE & PEI
4 SCREWS: STAINLESS STEEL, PASSIVATED

ELECTRICAL DATA:
1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~18 GHz

ENVIRONMENTAL DATA:
1 OPERATING TEMPERATURE: -65℃~+165℃
2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/31/23	J. Q

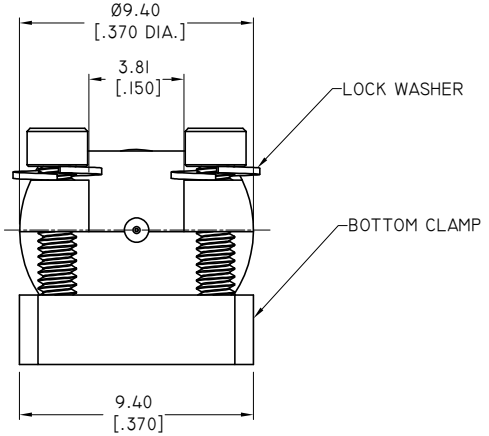

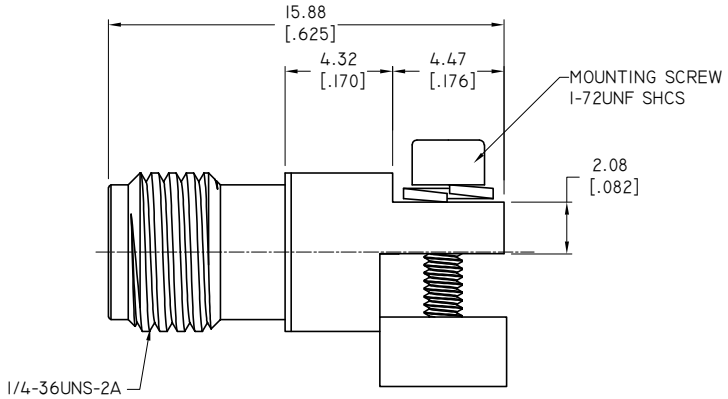

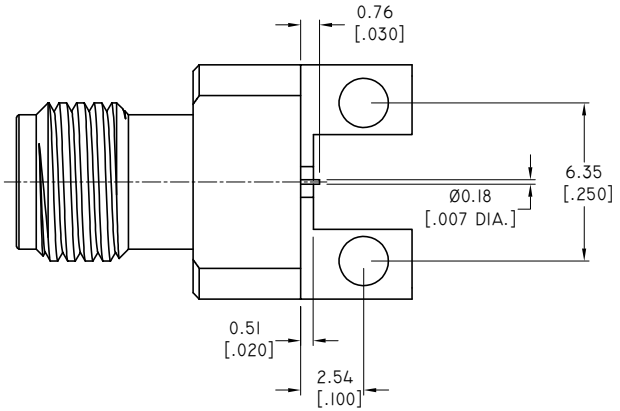

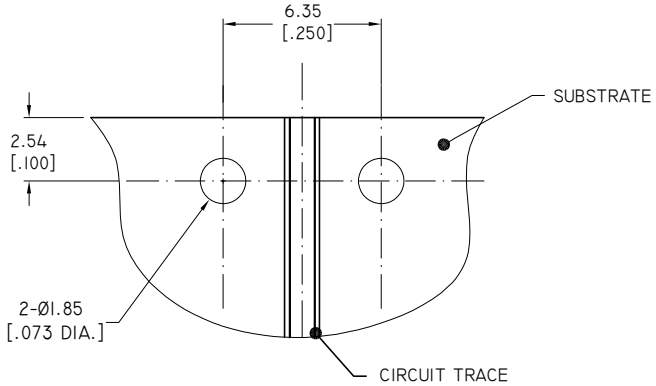

BOARD MOUNTING DETAIL

DRAWN	W. Y	DATE 05/31/23
CHECKED	X. Y	DATE 05/31/23
APPROVED	J. Q	DATE 05/31/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.08 [.003"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD

ANOISON

TITLE: SMA FEMALE EDGE LAUNCH, .250 PROFILE

VIEW

PART NO.: ANO 2112-4653

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A