

MATERIAL & FINISH:

- 1. BODY: BRASS, SEE SCHEDULE
- 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3. COUPLING NUT: BRASS, SEE SCHEDULE
- 4. CRIMP FERRULE: COPPER, NICKEL PLATED
- 5. INSULATOR: PTFE
- 6. GASKET: MVQ(SILICONE RUBBER)

ELECTRICAL DATA:






- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~3GHZ
- 3. VSWR: 1.30 MAX.
- 4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -40°C~+125°C
- 2. 2011/65/EU (RoHS): COMPLIANT

PART NO.	PART	FINISH
ANO 2113-2009	BODY/COUPLING NUT	GOLD
ANO 2113-2009-1		NICKEL
ANO 2113-2009-2		ALBALOY

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
E	PART NO. CHANGED	07/27/12	J. QU
F	ELECTRICAL DATA ADDED	09/27/12	J. QU
G	DRAWING FORMAT CHANGED	07/11/17	J. QU

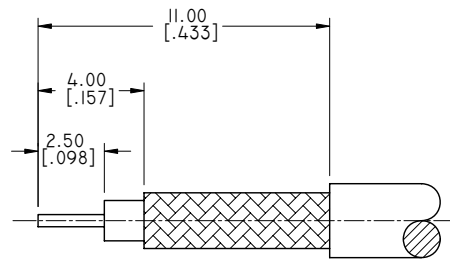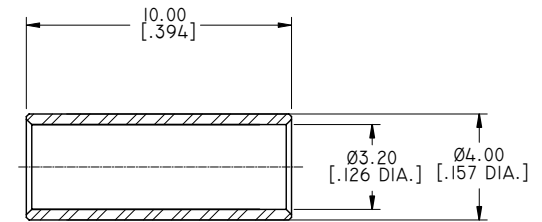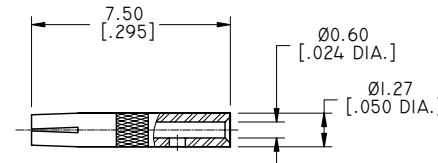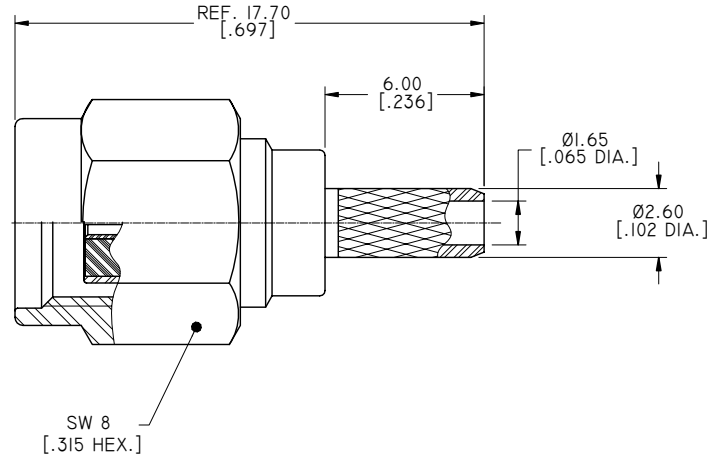

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	07/11/17
CHECKED	L. YANG	DATE	07/11/17
APPROVED	J. QU	DATE	07/11/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [ .005"		
.X	±0.20 [ .008"		
X	±0.50 [ .019"		
.X°	±1°		
X°	±2°		



TITLE  
RP SMA STRAIGHT MALE CRIMP FOR LMR100 /RG316/RG174 CABLE

VIEW	PART NO. ANO 2113-2009		
SIZE A3	SCALE 5:1	SHEET 1/1	REV. G