


4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/13/18	J. QU
B	ADDED TABLE	11/14/19	J. QU
C	DC-6GHZ WAS DC-3GHZ	02/27/24	J. QU

MATERIAL & FINISH:
 1. BODY: SEE TABLE
 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 3. COUPLING NUT: SEE TABLE
 4. INSULATOR: PTFE
 5. GASKET: MVQ(SILICONE RUBBER)

ELECTRICAL DATA:
 1. IMPEDANCE: 50 Ω
 2. FREQUENCY RANGE: DC-6GHZ
 3. VSWR: ≤1.30 AT DC-3GHZ
 ≤1.50 AT 3-6GHZ

ENVIRONMENTAL DATA:
 1. TEMPERATURE RANGE: -40 °C~+85 °C
 2. 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
 3. 1999/45/EC(REACH): COMPLIANT

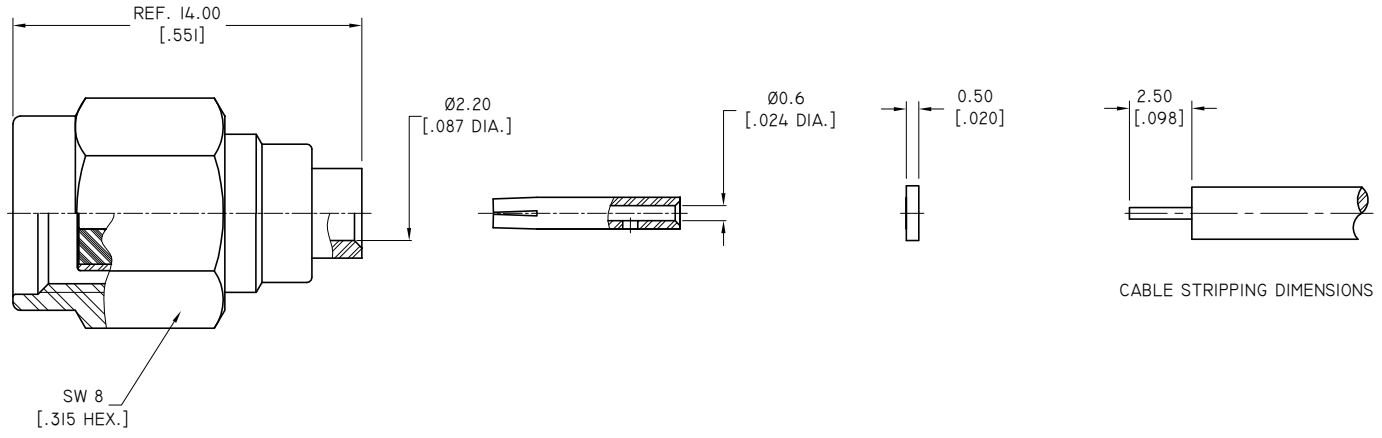

PART NO.	MATERIAL & FINISH	
	BODY	COUPLING NUT
ANO 2113-2088-1	BRASS, GOLD PLATED	BRASS, GOLD PLATED
ANO 2113-2088-2	BRASS, GOLD PLATED	STAINLESS STEEL, PASSIVATED
ANO 2113-2088-3	STAINLESS STEEL, GOLD PLATED	STAINLESS STEEL, PASSIVATED

DRAWN	P. CHEN	DATE	02/27/24
CHECKED	L. YANG	DATE	02/27/24
APPROVED	J. QU	DATE	02/27/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

TITLE			
RP SMA STRAIGHT MALE SOLDER FOR RG405/.086 CABLE			
VIEW		PART NO.	
		ANO 2113-2088	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	C

4 3 2 1