

**MATERIAL & FINISH:**

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: BRASS, ALBALOY PLATED
- 4 INSULATOR: PTFE
- 5 RETAINING RING: BERYLLIUM COPPER ALLOY, UNPLATED
- 6 GASKET: SILICONE RUBBER

**ELECTRICAL DATA:**


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/21/21	J QU

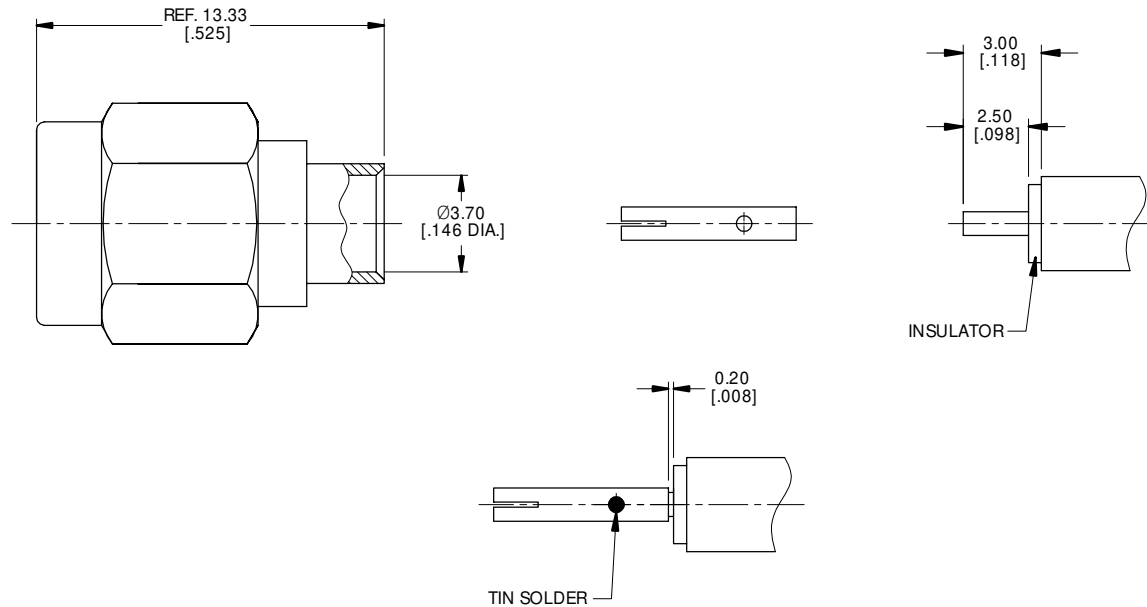

DRAWN	X. B. YANG	DATE	04/21/21
CHECKED	W. YANG	DATE	04/21/21
APPROVED	J QU	DATE	04/21/21

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:


.xx	±0.13 [.005"]
.x	±0.20 [.008"]
X	±0.50 [.019"]
.x°	±1°
x°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD



TITLE  
RP SMA STRAIGHT MALE SOLDER FOR .141 CABLE

VIEW



PART NO.

ANO 2113-2592

SIZE  
A3

SCALE  
5:1

SHEET  
1/1

REV.  
A