

4

3

2

1

1.0 MATERIAL & FINISH:

- 1.1 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.2 INSULATOR: PTFE
- 1.3 BODY: BRASS, GOLD PLATED


2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+85°C
- 2.2 2015/863/(RoHS): COMPLIANT
- 2.3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~18GHZ
- 3.3 VSWR: 1.15 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/18/19	J. QU

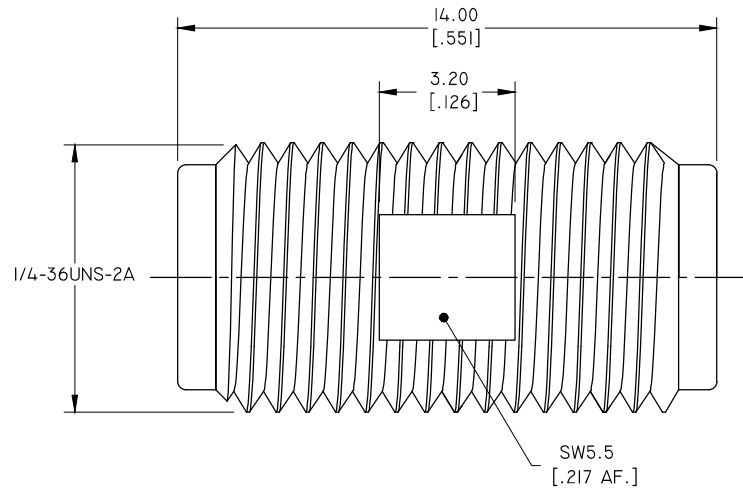

DRAWN	W. YANG	DATE	06/18/19
CHECKED	L. YANG	DATE	06/18/19
APPROVED	J. QU	DATE	06/18/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13	[.005"]	
.X	±0.20	[.008"]	
X	±0.50	[.019"]	
.X°	±1°		
X°	±2°		



TITLE			
ADAPTER, SMA FEMALE TO SMA FEMALE			
VIEW	PART NO.		
	ANO 212-212-1501		
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	A

4

3

2

1