

4

3

2

1

**MATERIAL & FINISH:**

- 1. OUTER CONTACT: STAINLESS STEEL, GOLD PLATED
- 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3. INSULATOR: PTFE


**ENVIRONMENTAL DATA:**

- 1. TEMPERATURE RANGE: -65°C~+165°C
- 2. 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3. 1999/45/EC(REACH): COMPLIANT


**ELECTRICAL DATA:**

- 1. IMPEDANCE: 50 OHMS
- 2. FREQUENCY RANGE: DC~18 GHz
- 3. INSERTION LOSS: 0.07 √F (GHz) MAX.
- 4. RF LEAKAGE: -(100-F(GHz)) dB MAX.
- 5. VOLTAGE RATING: 500 V MAX.
- 6. DIELECTRIC WITHSTANDING VOLTAGE: 750 V MIN.
- 7.INSULATION RESISTANCE: 5000 MΩ MIN.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/26/23	J. Q

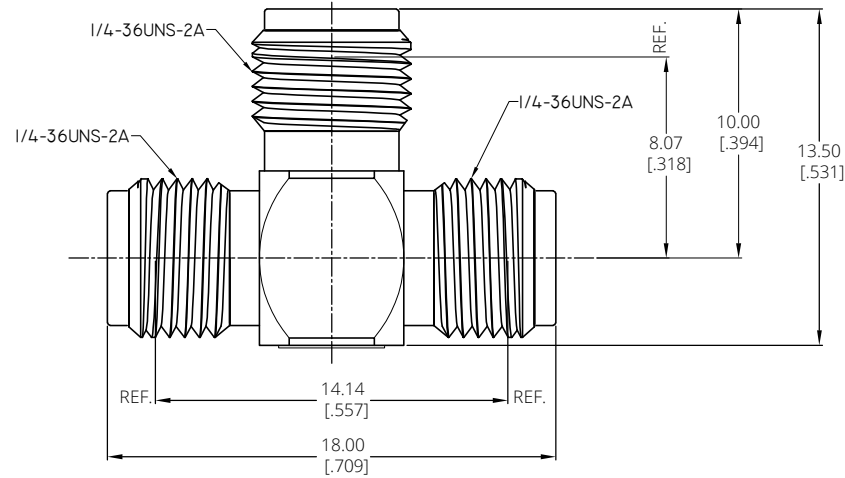

DRAWN	W. Y	DATE	09/26/23
CHECKED	X. Y	DATE	09/26/23
APPROVED	J. Q	DATE	09/26/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
XX	±0.13 [005"]		
X	±0.20 [008"]		
X*	±0.50 [019"]		
X**	±1"		
X***	±2"		



**TITLE**  
"T" ADAPTER, SMA TRIPLE FEMALE

**VIEW** 

**PART NO.**  
ANO 212-212-2123

<b>SIZE</b> A3	<b>SCALE</b> 2.5:1	<b>SHEET</b> 1/1	<b>REV.</b> A
-------------------	-----------------------	---------------------	------------------

D

C

B

A

D

C

B

A

4

3

2

1