

1.0 MATERIAL & FINISH:

- 1.1 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.2 INSULATOR: PTFE & PEI
- 1.3 BODY 1: STAINLESS STEEL, PASSIVATED
- 1.4 BODY 2: BERYLLIUM COPPER ALLOY, GOLD PLATED


2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+155°C
- 2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~26.5GHZ
- 3.3 VSWR: 1.20 MAX. AT DC~18GHZ  
1.35 MAX. AT 18GHZ~26.5GHZ
- 3.4 WORKING VOLTAGE: 480 V RMS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	CHANGED FREQUENCY RANGE	08/20/15	J. QU
C	STRUCTURE CHANGED	10/17/15	J. QU
D	STRUCTURE CHANGED	10/29/15	J. QU

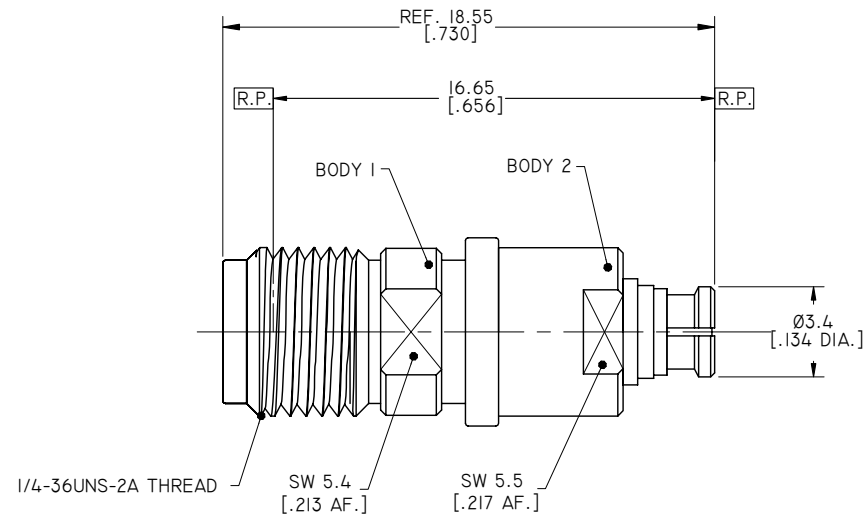

DRAWN	P. CHEN	DATE	10/29/15	
CHECKED	X. B. YANG	DATE	10/29/15	
APPROVED	J. QU	DATE	10/29/15	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD</small>		TITLE
				ADAPTER, SMA FEMALE TO SMP FEMALE
VIEW		PART NO.		
		ANO 212-932-1141		
SIZE	A3	SCALE	5:1	SHEET 1/1
REV.	D			