

4

3

2

1

## 1.0 MATERIAL &amp; FINISH

- 1.1 BODY: BRASS, GOLD PLATED  
 1.2 CENTER CONTACT: BRASS, GOLD PLATED  
 1.3 COUPLING NUT: BRASS, GOLD PLATED  
 1.4 INSULATOR: PTFE  
 1.5 CRIMP FERRULE: COPPER, NICKEL PLATED  
 1.6 GASKET: MVQ(SILICONE RUBBER)

## 2.0 ENVIRONMENTAL DATA:


- 2.1 TEMPERATURE RANGE: -55°C~+165°C  
 2.2 2011/65/EU (RoHS): COMPLIANT

## 3.0 ELECTRICAL SPECIFICATIONS:


- 3.1 IMPEDANCE: 50 Ω  
 3.2 FREQUENCY RANGE: DC~12.4GHZ  
 3.3 VSWR: ≤1.35 AT DC~6GHZ

## REVISIONS


REV.	DESCRIPTION	DATE	APPROVED
I	DRAWING FORMAT CHANGED	08/31/17	J. QU
J	MOVE TABLE	03/14/18	J. QU

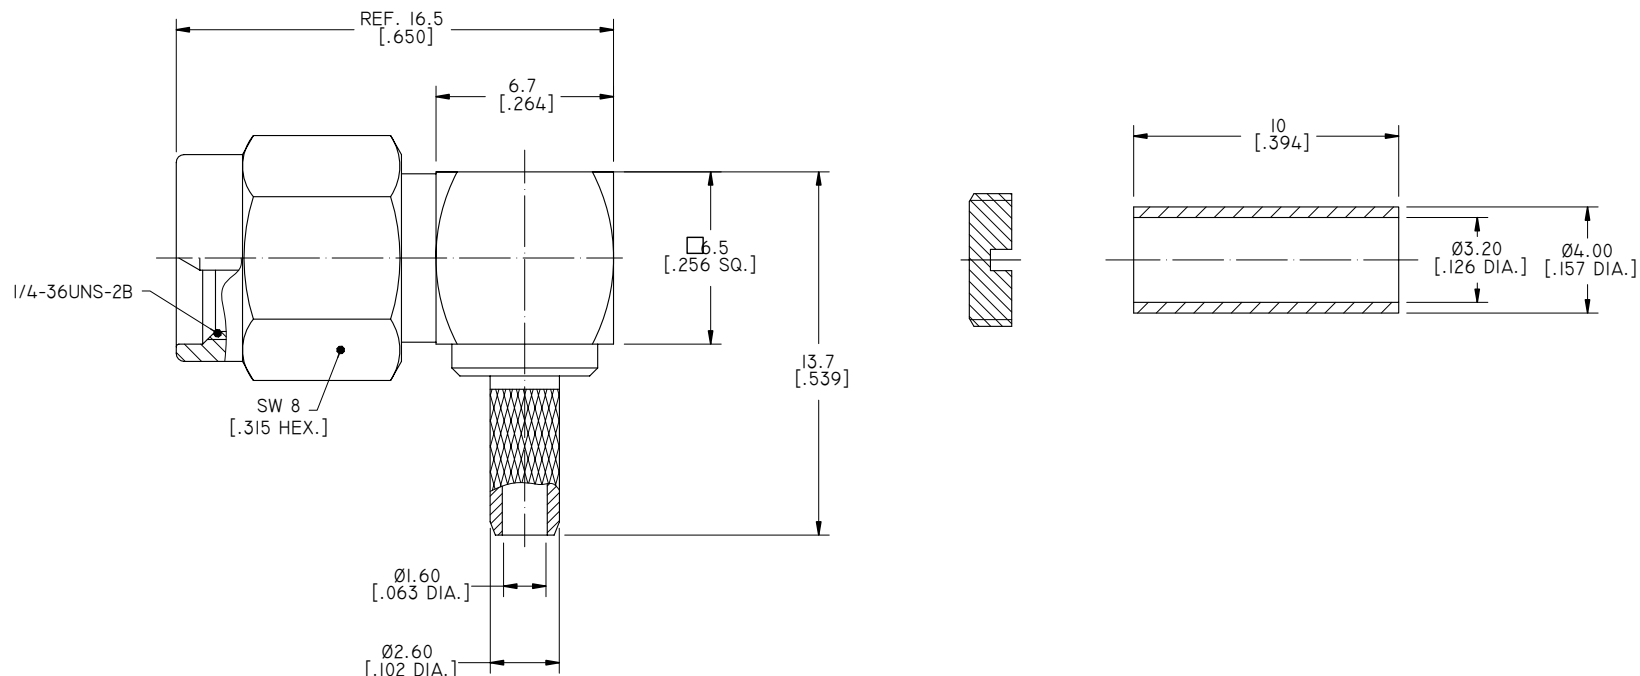

## HEX. CRIMP TOOL



CRIMP WIDTH: 7.5

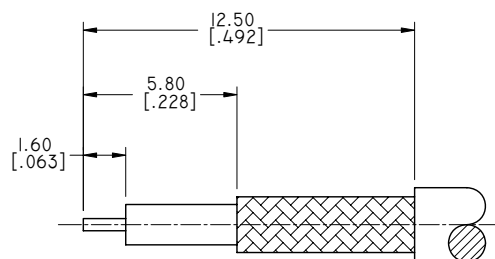

CABLE STRIPPING DIMENSIONS


DRAWN	P. CHEN	DATE	03/14/18
CHECKED	L. YANG	DATE	03/14/18
APPROVED	J. QU	DATE	03/14/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



## TITLE

SMA RIGHT ANGLE MALE CRIMP FOR  
RG316/RG174/RG188 CALBE

## VIEW



## PART NO.

ANO 2121-2005

## SIZE

A3

## SCALE

5:1

## SHEET

1/1

## REV.

J