

MATERIAL & FINISH

- 1 BODY: SEE TABLE
- 2 CENTER CONTACT: SEE TABLE
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: SEE TABLE
- 5 GASKET: SILICONE RUBBER




ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~12.4 GHZ
- 3 VSWR: 1.20 MAX.

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
J	FINISH CHANGED	12/05/14	J. QU
K	PART NO. ADDED	12/08/16	J. QU
L	1. THE CABEL SOLDER STOP ADDED 2. CABLE STRIPPING DIMENSIONS CHANGED	07/10/17	J. QU
H	SOLDER STOP REMOVED	02/01/18	J. QU
I	1. PART NO. ANO 2121-2079-5 ADDED 2. VSWR ADDED 3. CABLE STRIPPING DIMENSIONS CHANGED 4. SOLDER STOP ADDED	02/06/18	J. QU

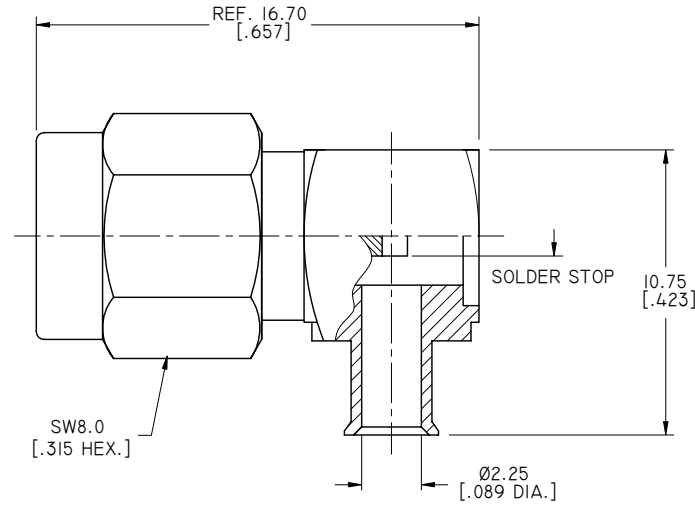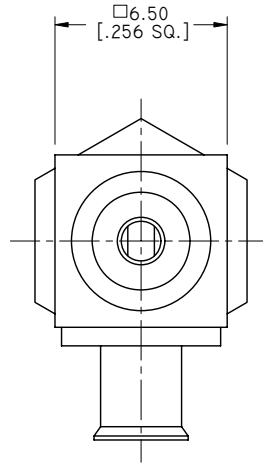

TABLE

PART NO.	PART	MATERIAL	FINISH
ANO 2121-2079-1	BODY	BRASS	GOLD
	CENTER CONTACT	BRASS	GOLD
	COUPLING NUT	BRASS	GOLD
ANO 2121-2079-2	BODY	BRASS	ALBALOY
	CENTER CONTACT	BRASS	SILVER
	COUPLING NUT	BRASS	ALBALOY
ANO 2121-2079-3	BODY	BRASS	GOLD
	CENTER CONTACT	BRASS	GOLD
	COUPLING NUT	STAINLESS STEEL	PASSIVATED
ANO 2121-2079-4	BODY	STAINLESS STEEL	GOLD
	CENTER CONTACT	BRASS	GOLD
	COUPLING NUT	STAINLESS STEEL	PASSIVATED
ANO 2121-2079-5	BODY	BRASS	ALBALOY
	CENTER CONTACT	BRASS	GOLD
	COUPLING NUT	STAINLESS STEEL	PASSIVATED

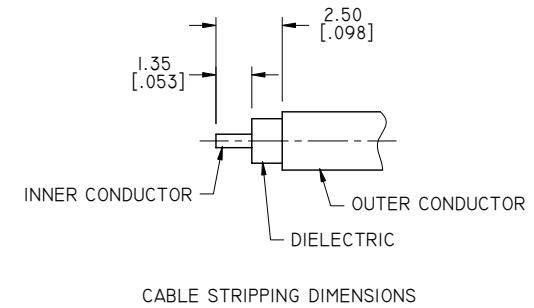

DRAWN X. B. YANG CHECKED W. YANG APPROVED J. QU	DATE 02/08/18 DATE 02/08/18 DATE 02/08/18		TITLE SMA RIGHT ANGLE MALE SOLDER FOR .086 CABLE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°			THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD		VIEW 	PART NO. ANO 2121-2079
		SIZE A3	SCALE 5:1	SHEET 1/1	REV. I	