

MATERIAL & FINISH

- 1 BODY: SEE TABLE
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: SEE SCHEDULE
- 5 GASKET: SILICONE RUBBER
- 6 CAP: BRASS, GOLD PLATED


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~12.4 GHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/07/14	J. QU
B	PART NO. ADDED	12/10/16	J. QU
C	CAP: BRASS, GOLD PLATED ADDED	06/19/17	J. QU
D	1. THE CABEL SOLDER STOP ADDED 2. CABLE STRIPPING DIMENSIONS CHANGED	06/29/17	J. QU
E	CUTAWAY VIEW ADDED	07/10/17	J. QU

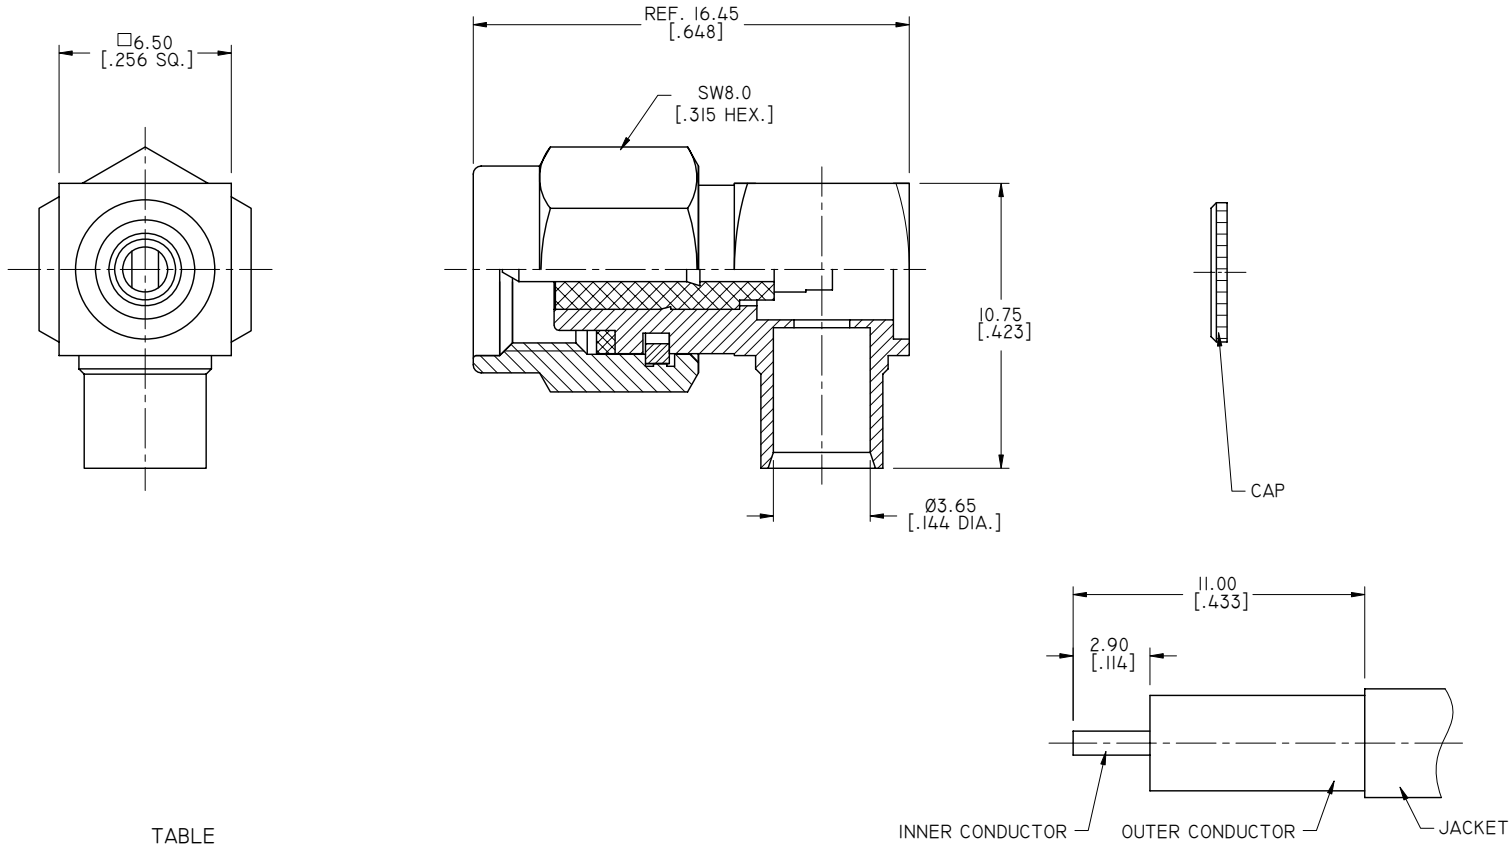

TABLE

PART NO.	PART	MATERIAL	FINISH
ANO 2121-2253-1	BODY	BRASS	GOLD
	COUPLING NUT	BRASS	GOLD
ANO 2121-2253-2	BODY	BRASS	GOLD
	COUPLING NUT	STAINLESS STEEL	PASSIVATED
ANO 2121-2253-3	BODY	STAINLESS STEEL	GOLD
	COUPLING NUT	STAINLESS STEEL	PASSIVATED

CABLE STRIPPING DIMENSIONS

DRAWN X. B. YANG	DATE 07/10/17	
CHECKED L. YANG	DATE 07/10/17	
APPROVED J. QU	DATE 07/10/17	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD</small>
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		<b>TITLE</b> SMA RIGHT ANGLE MALE SOLDER FOR .141 CABLE
<b>VIEW</b> 		<b>PART NO.</b> ANO 2121-2253
SIZE A3	SCALE 5:1	<b>SHEET</b> 1/1 <b>REV.</b> E