

4 3 2 1

MATERIAL & FINISH:

- 1 BODY: SEE TABLE
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLO Y, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: SEE TABLE
- 5 BRAID SHIM: BRASS, GOLD PLATED





ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.35 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65 °C~+155 °C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/26/16	J. QU
B	CHANGED CABLE STRIPPING DIMENSIONS	05/10/16	J. QU
C	ADDED P/N	12/03/24	J. QU

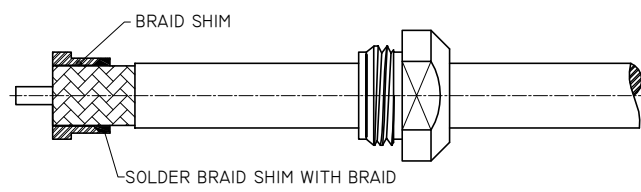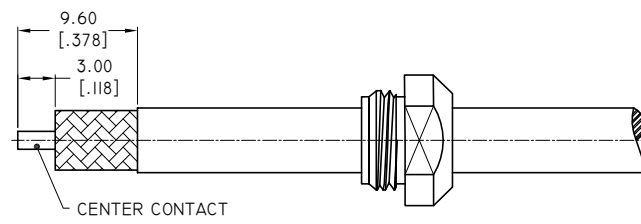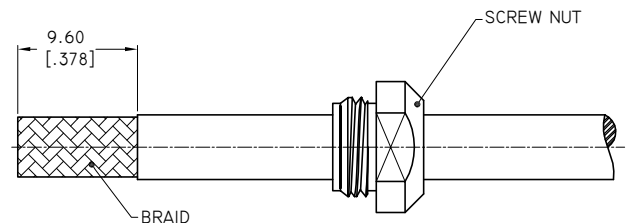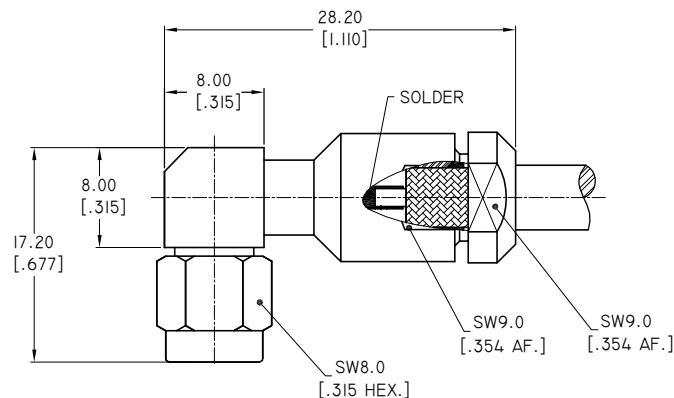

CABLE STRIPPING DIMENSIONS

PART NO.	BODY/COUPLING NUT MATERIAL & FINISH
ANO 2121-2380	SUS316 STAINLESS STEEL, PASSIVATED
ANO 2121-2380-I	SUS303 STAINLESS STEEL, PASSIVATED

DRAWN	P. CHEN	DATE	12/03/24
CHECKED	L. YANG	DATE	12/03/24
APPROVED	J. QU	DATE	12/03/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

TITLE
SMA R/A MALE SOLDER FOR PLEX -210 CABLE

VIEW

PART NO. ANO 2121-2380			
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. C

4 3 2 1