
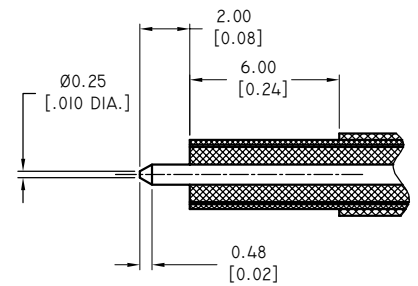


4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/20/16	J. QU
B	CHANGED DRAWINGS	02/25/20	J. QU

- 1.0 MATERIAL & FINISH:**  
 1.1 BODY: STAINLESS STEEL, PASSIVATED  
 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED  
 1.3 SOLDER FERRULE: BRASS, GOLD PLATED  
 1.4 COUPLING NUT: STAINLESS STEEL, PASSIVATED  
 1.5 INSULATOR: PEI
- 2.0 ELECTRICAL DATA:**  
 2.1 IMPEDANCE: 50 Ω  
 2.2 FREQUENCY RANGE: DC-50GHZ  
 2.3 VSWR: 1.25 TYP.
- 3.0 ENVIRONMENTAL DATA:**  
 3.1 TEMPERATURE RANGE: -55 °C~+125 °C  
 3.2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT  
 3.3 1999/45/EC(REACH): COMPLIANT

- 4.0 MECHANICAL DATA:**  
 4.1 MECHANICAL DURABILITY: 500 CYCLES  
 4.2 CENTER CONTACT: CAPTIVATED  
 4.3 OUTER CONTACT: SOLDERED

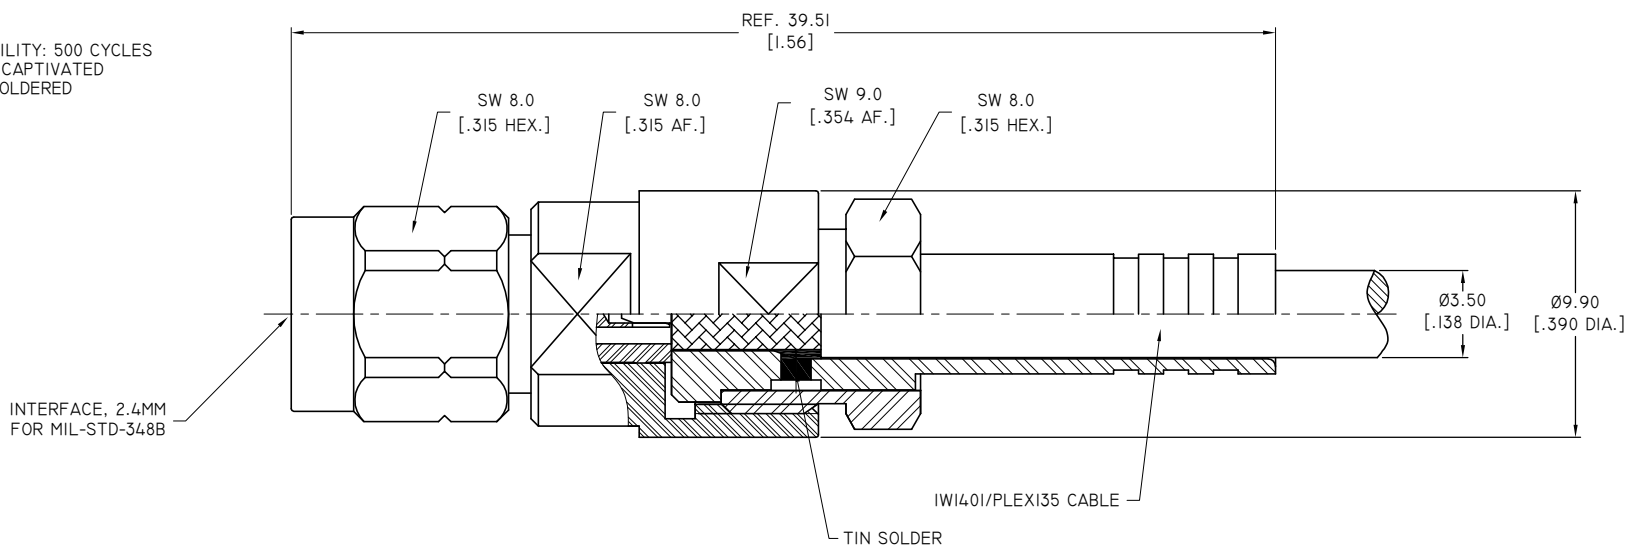

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	02/25/20
CHECKED	L. YANG	DATE	02/25/20
APPROVED	J. QU	DATE	02/25/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED		TOLERANCE ARE:	
.XX	±0.13 [0.005"]	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
X°	±1°		
X°	±2°		



TITLE			
2.4MM STRAIGHT MALE SOLDER FOR IW401/PLEXI35 CABLE CAPTIVATED CONTACT			
VIEW		PART NO.	
		ANO 2211-2003	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	B

4 3 2 1