

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 NUT: STAINLESS STEEL, PASSIVATED
- 5 INSULATOR: PEI



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~50 GHZ
- 3 VSWR: 1.11 MAX. DC-18GHZ
1.15 MAX. 18-26.5 GHZ
1.29 MAX. 26.5-50GHZ
- 4 INSERTION LOSS: .07X-/F (GHZ)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/24/18	J. QU

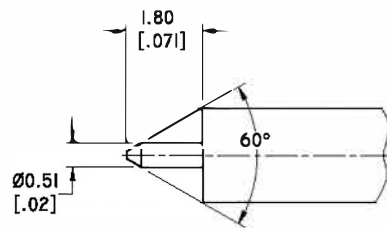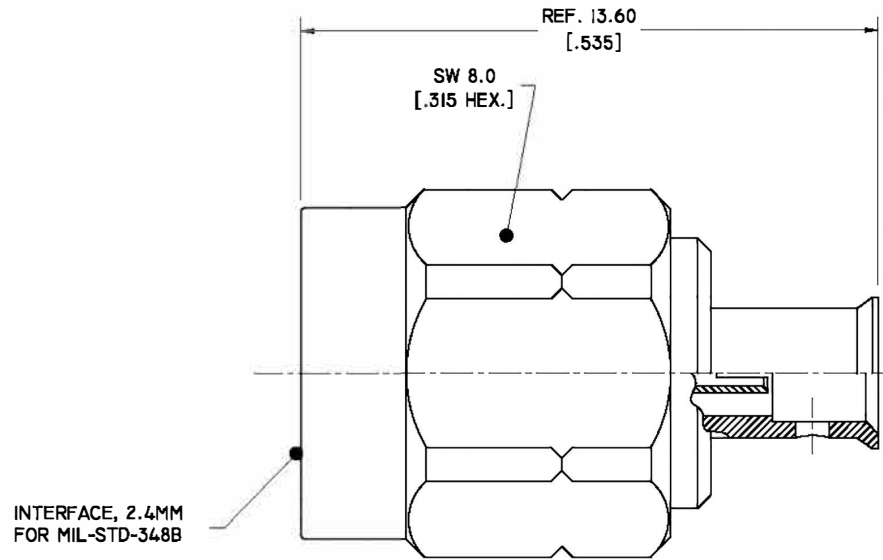

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	10/24/18
CHECKED	X. B. YANG	DATE	10/24/18
APPROVED	J. QU	DATE	10/24/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
-XX	±0.13 [.005"]		
X	±0.25 [.010"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE
2.4MM STRAIGHT MALE SOLDER FOR UT-085/UT-085C-FORM CABLE, CAPTIVATED CONTACT

VIEW	PART NO. ANO 2211-2033		
	SIZE A3	SCALE 5:1	SHEET 1/1
			REV. A

4

3

2

1