

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/18/20	J QU

1.0 MATERIAL & FINISH

- 1.1 BODY: STAINLESS STEEL, GOLD PLATED
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 1.4 INSULATOR: PEI

2.0 ENVIRONMENTAL DATA:



- 2.1 TEMPERATURE RANGE: -55°C~+165°C
- 2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL DATA:

- 3.1 IMPEDANCE: 50 OHMS
- 3.2 FREQUENCY RANGE: DC-50GHZ
- 3.3 VSWR: 1.30 MAX.

4.0 MECHANICAL DATA:

- 4.1 MECHANICAL DURABILITY: 500 CYCLES MIN.
- 4.2 CENTER CONTACT: CAPTIVATED
- 4.3 OUTER CONTACT: SOLDERED

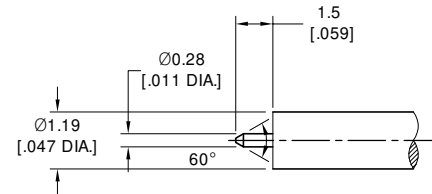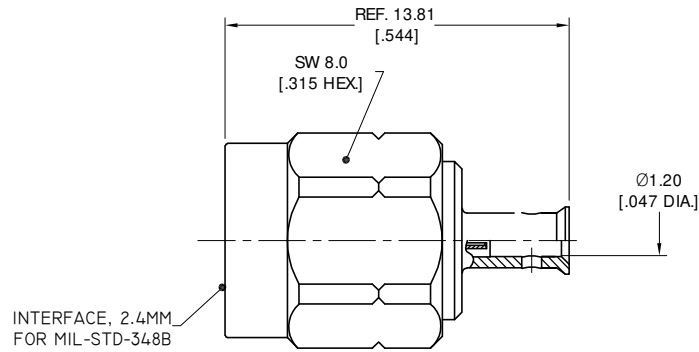

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	09/18/20
CHECKED	X. B. YANG	DATE	09/18/20
APPROVED	J QU	DATE	09/18/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X'	±1°		
X'	±2°		



TITLE			
2.4MM STRAIGHT MALE SOLDER FOR .047 CABLE, SOLDER DIRECT			
VIEW		PART NO.	
		ANO 2211-2044	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A