

4

3

2

1

**MATERIAL & FINISH:**

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 RETAINING RING: BERYLLIUM COPPER, UNPLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4 CENTER CONTACT: STAINLESS STEEL, PASSIVATED


**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 PHASE DEVIATION  $\leq \pm 1^\circ$

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -40 °C ~ +85 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/16/25	J Q

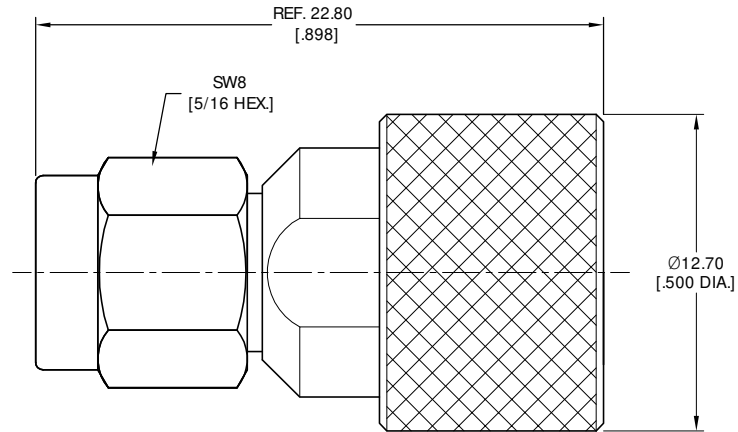

DRAWN	P. C	DATE	05/16/25
CHECKED	W. Y	DATE	05/16/25
APPROVED	J Q	DATE	05/16/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
.X°	±1°		
X°	±2°		



TITLE			
SHORT CIRCUIT, 3.5MM MALE			
VIEW		PART NO.	
		ANO 2511-6057	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A

4

3

2

1