MATERIAL & FINISH

1 BODY: STAINLESS STELL, PASSIVATED
2 OUTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
4 INSULATOR: PEI

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~26.5 GHz
3 VSWR: 1.30 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/14/21	J. QU

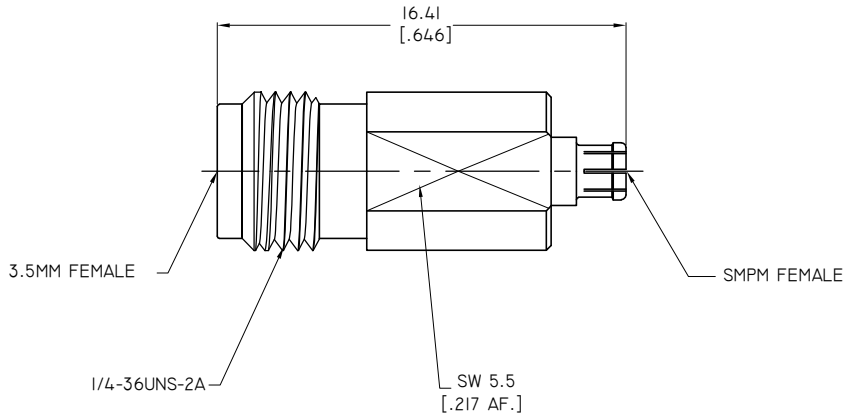

DRAWN	W. YANG	DATE 04/14/21
CHECKED	L. YANG	DATE 04/14/21
APPROVED	J. QU	DATE 04/14/21

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD

ANOISON

TITLE: ADAPTER, 3.5MM FEMALE TO SMPM FEMALE

VIEW

PART NO. ANO 252-942-1566

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A