

MATERIAL

1. BODY: BRASS
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY
3. INSULATOR: PTFE
4. UNLOCK SLEEVE: BRASS
5. COUPLING NUT: BRASS

FINISH:

1. CENTER CONTACT: GOLD
2. UNLOCK SLEEVE: NICKEL
- 3.

PART NUMBER	PART	FINISH
ANO 261-211-1029	OUTER CONTACT /COUPLING NUT	ALBALOY
ANO 261-211-1029A		GOLD


ENVIRONMENTAL DATA:



1. TEMPERATURE RANGE: -55°C~+125°C
2. 2002/95/EC (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~18GHZ
3. VSWR: ≤1.15 AT DC~6GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASE TO MFG.	05/07/13	J. QU
B	STRUCTURE CHANGED	10/21/13	J. QU

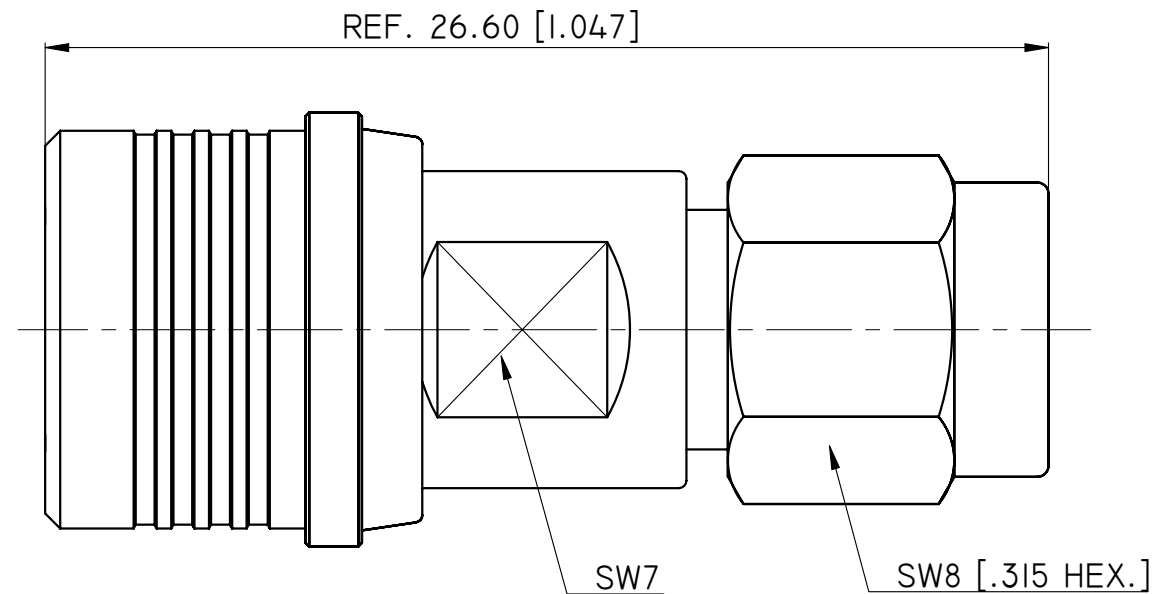

DRAWN	H. ZHANG	DATE	10/21/13						
CHECKED	X. B. YANG	DATE	10/21/13						
APPROVED	J. QU	DATE	10/21/13						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2013 ANOISON					
TITLE				ADAPTER, QMA MALE TO SMA MALE					
VIEW				PART NO. ANO 261-211-1029					
		SIZE	A3	SCALE	5:1	SHEET	1/1	REV.	B