

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, SEE TABLE
- 3 INSULATOR: PTFE
- 4 UNLOCK SEEVE: BRASS, ALBALOY PLATED
- 5 O-RING: MVQ(SILICONE RUBBER)



ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/23/09	J. QU
B	ADD STRUCTURE	07/03/12	J. QU
C	CHENGED STRUCTURE	04/28/17	J. QU

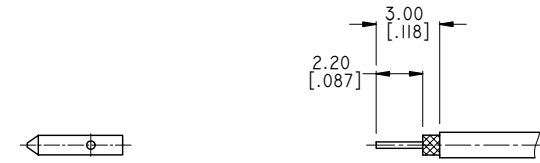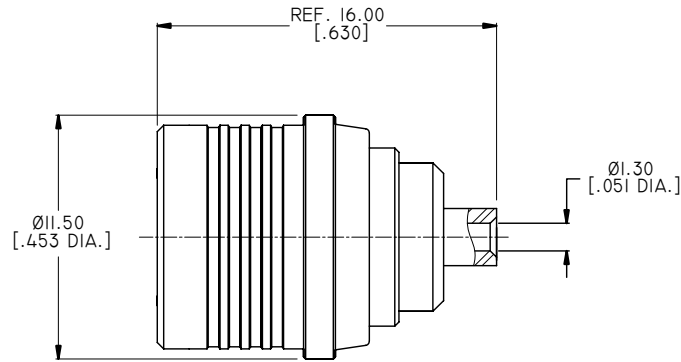

CABLE STRIPPING DIMENSIONS

PART NO.	PART	FINISH
ANO 2611-2038	CENTER CONTACT	GOLD
ANO 2611-2038-1		SILVER

DRAWN	P. CHEN	DATE	04/28/17
CHECKED	L. YANG	DATE	04/28/17
APPROVED	J. QU	DATE	04/28/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
QMA STRAIGHT MALE SOLDER FOR .047 CABLE			
VIEW		PART NO.	
		ANO 2611-2038	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	C

4

3

2

1